




8000 Series, Model 46

TorqueMaster® - Single and Double Spring
Installation Instructions and Owner's Manual

Portland Source Plant

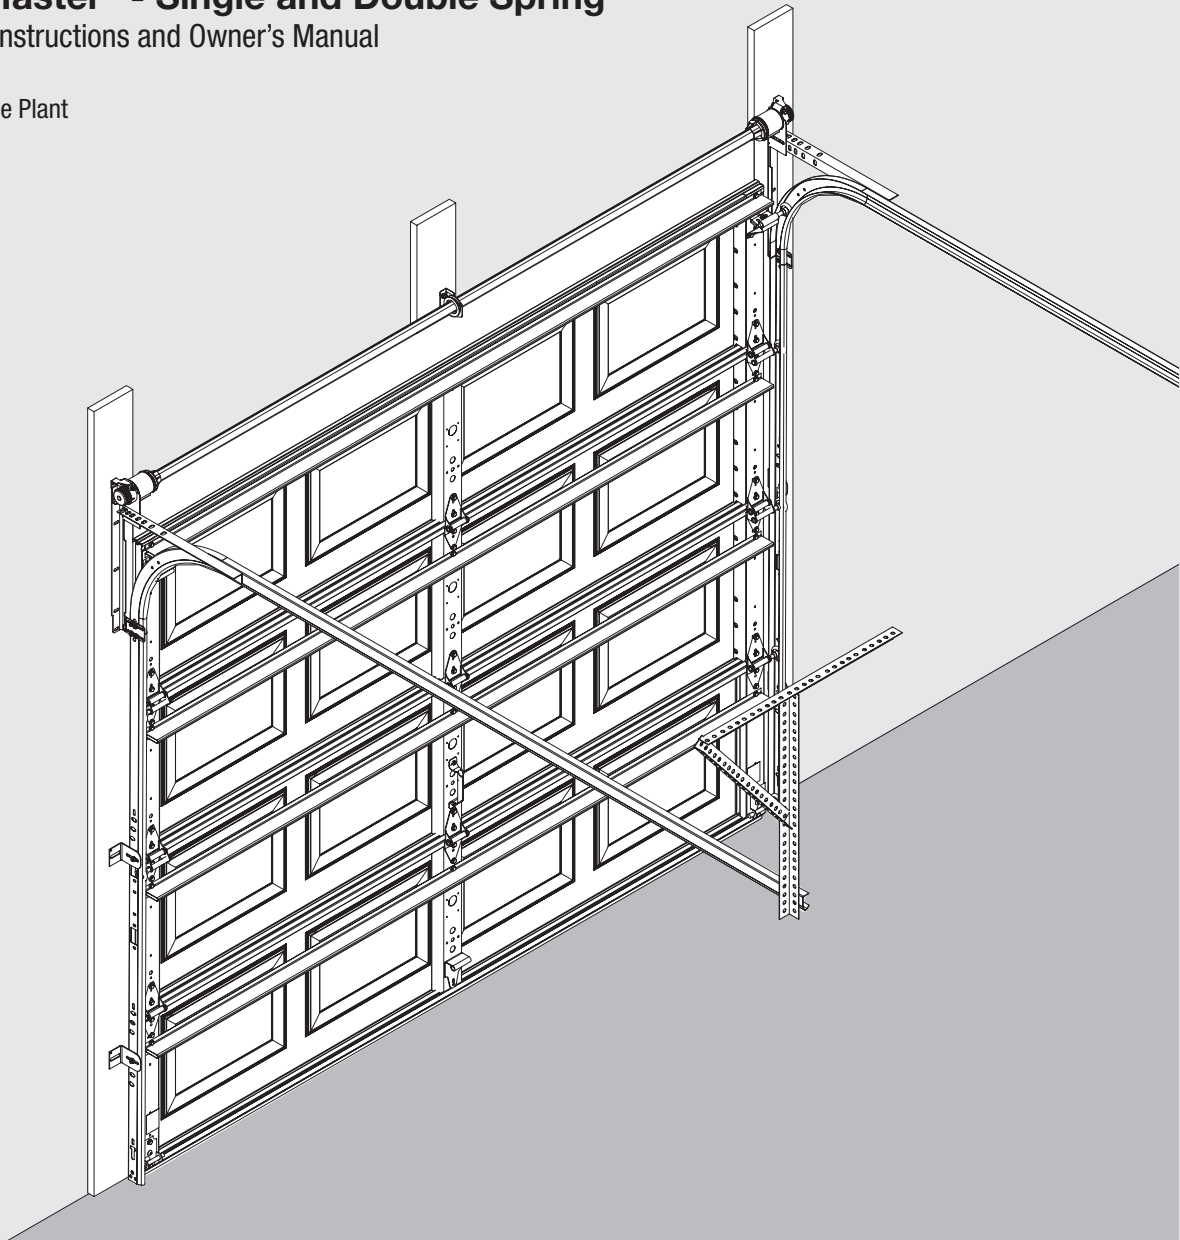

Wayne-Dalton Corp.
P.O. Box 67
Mt. Hope, OH 44660
www.wayne-dalton.com

© Copyright 2009 Wayne-Dalton Corp.

Part No. 323295

REV2 08/03/2009

IMPORTANT NOTICE!
Read these instructions carefully before attempting installation. If in question about any of the procedures, do not perform the work. Instead, have a qualified door agency do the installation or repairs.

Table of Contents

Important Safety Instructions	2
Package Contents	3-4
Door Section Identification	4
Tools Required	5
Pre-Installation	5-10
Removing The Old Door	5-9
Preparing The Opening	10
Installation	11-32
Optional Installations	33-35
Side Lock	33
DoorMaster™ Bracket	33
Alternative Step Plate	34
Pull Rope	34
Trolley Operator	35
Maintenance	36
Cleaning	36
Painting Instructions	36
Warranty	37
Dealer Locator Information	38

Definition of key words used in this manual:

WARNING

INDICATES A POTENTIALLY HAZARDOUS SITUATION WHICH, IF NOT AVOIDED, COULD RESULT IN SEVERE OR FATAL INJURY.

CAUTION: PROPERTY DAMAGE OR INJURY CAN RESULT FROM FAILURE TO FOLLOW INSTRUCTIONS.

IMPORTANT: REQUIRED STEP FOR SAFE AND PROPER DOOR OPERATION.

NOTE: Information assuring proper installation of the door.

WARNING

READ THESE INSTRUCTIONS CAREFULLY BEFORE ATTEMPTING INSTALLATION. IF IN QUESTION ABOUT ANY OF THE PROCEDURES, DO NOT PERFORM THE WORK. INSTEAD, HAVE A QUALIFIED DOOR AGENCY DO THE INSTALLATION OR REPAIRS.

1. **READ AND FOLLOW ALL INSTALLATION INSTRUCTIONS.**
2. Wear protective gloves during installation to avoid possible cuts from sharp metal edges.
3. It is always recommended to wear eye protection when using tools, otherwise severe or fatal eye injury could result.
4. Avoid installing your new door on windy days. Door could fall during the installation causing severe or fatal injury.
5. Doors 12'-0" wide and wider should be installed by two persons, to avoid possible injury.
6. Operate door **ONLY** when it is properly adjusted and free from obstructions.
7. If a door becomes hard to operate, inoperative or is damaged, immediately have necessary adjustments and/or repairs made by a trained door system technician using proper tools and instructions.
8. **DO NOT** stand or walk under a moving door, or permit anybody to stand or walk under an electrically operated door.
9. **DO NOT** place fingers or hands into open section joints when closing a door. Use lift handles/gripping points when operating door manually.
10. **DO NOT** permit children to operate garage door or door controls. Severe or fatal injury could result, should the child become entrapped between the door and the floor.
11. Due to constant extreme spring tension, **DO NOT** attempt any adjustment, repair or alteration to any part of the door, especially to springs, spring brackets, bottom corner brackets, red colored fasteners, cables or supports. To avoid possible severe or fatal injury, have any such work performed by a trained door systems technician using proper tools and instructions.
12. On electrically operated doors, pull down ropes must be removed and locks must be removed or made inoperative in the open (unlocked) position.
13. Top section of door may need to be reinforced when attaching an electric opener. Check door and/or opener manufacturer's instructions.
14. **VISUALLY** inspect door and hardware monthly for worn and or broken parts. Check to ensure door operates freely.
15. Test electric opener's safety features monthly, following opener manufacturer's instructions.
16. **NEVER** hang tools, bicycles, hoses, clothing or anything else from horizontal tracks. Track systems are not intended or designed to support extra weight.

After installation is complete, fasten this manual near garage door.


Package Contents

NOTE: DEPENDING ON THE DOOR MODEL, SOME PARTS LISTED WILL NOT BE SUPPLIED IF NOT NECESSARY. REAR SUPPORTS MAY OR MAY NOT BE INCLUDED WITH YOUR DOOR.


(2) HORIZONTAL TRACK WITH ATTACHED HORIZONTAL ANGLE RH/LH



(1) TORQUEMASTER® SPRING TUBE

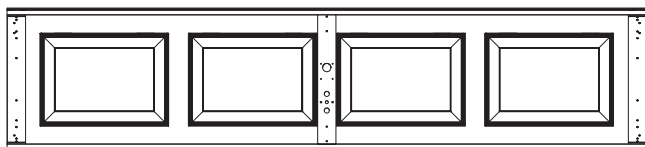


DOOR SECTIONS (AS REQUIRED)

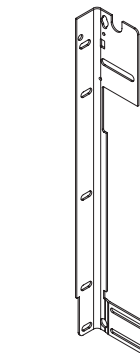

(2) FULLY ADJUSTABLE RH/LH FLAGANGLES




(2) VERTICAL RH/LH TRACK




JAMB BRACKETS (AS REQUIRED)




LUBRICATING OIL (AS REQUIRED)




RIGHT AND LEFT BOTTOM BRACKETS




DRIVE GEARS (AS REQUIRED)




RIGHT & LEFT DRUM WRAPS



(1) LOOSE WINDING SHAFT (SINGLE SPRING ONLY)




RIGHT AND LEFT CABLE DRUM ASSEMBLIES




COUNTER COVER(S) (AS REQUIRED)




MANUAL




(2) TOP BRACKET BASES




ROLLERS (AS REQUIRED)




(1) CENTER BRACKET ASSEMBLY




IDRIVE® OPERATOR (SOLD SEPARATELY)



RIGHT & LEFT END BRACKETS




(2) TOP BRACKET SLIDES




U-BAR (AS REQUIRED)




(2) LIFT HANDLES & SPACERS




WEATHER SEAL & NAILS (IF INCLUDED)




(1) STEP PLATE OUTSIDE




#1, #2, #3 & #4 HINGES (AS REQUIRED)



COUNTER GEAR(S) (AS REQUIRED)




#6 SCREW EYE AND PULL ROPE (IF INCLUDED)




(1) STEP PLATE INSIDE


Package Contents Continued...



(2) 3/8" - 16
HEX NUTS




1/4" - 20 HEX NUTS
(LIFT HANDLE)




1/4" - 20 FLANGED HEX
NUTS (AS REQUIRED)




(2) #10 PHILLIPS
HEAD SCREWS




1/4" - 14 X 5/8" SELF TAPPING
SCREWS (AS REQUIRED)




(2) 1/4" - 20 X 5/8"
TAMPER-RESISTANT
SCREWS




1/4" - 20 X 5/8"
CARRIAGE BOLTS
(AS REQUIRED)




1/4" - 20 X 7/8" SELF DRILLING
SCREWS (AS REQUIRED)




(2) 3/8" - 16 X 3/4"
HEX HEAD BOLTS




5/16" X 2" HEX HEAD LAG SCREWS
(AS REQUIRED)



1/4"-20 X 11/16" SELF DRILLING
SCREWS (AS REQUIRED)



(2) 1/4" X 2-1/2" CARRIAGE BOLTS (LIFT HANDLE)



(2) #8 X 1-5/8" SELF TAPPING SCREWS
(STEP PLATE)

Door Section Identification

Tools Needed:


The **BOTTOM SECTION** can be identified by the factory attached bottom astragal and the bottom bracket warning labels on each end stile. This section is always the 1st section on four and five section doors.

The **LOCK SECTION** may have a yellow and black warning label on the right side of the section. This section is always the 2nd section on four and five section doors.


The **INTERMEDIATE I SECTION** may have a warning label attached to either right or left hand endstile of the section. This section is always the 3rd section from the bottom of the door.

The **INTERMEDIATE II SECTION** is always the 4th section on five section door.

The **TOP SECTION** is always the 4th section on four section door and the 5th section on five section door.

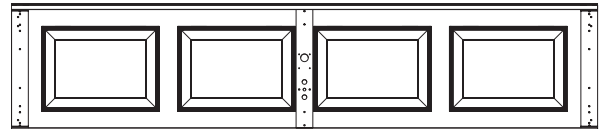


TOP SECTION

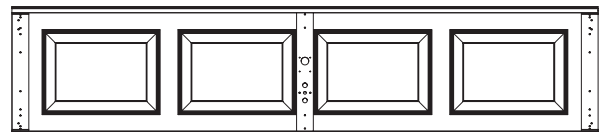


INTERMEDIATE II SECTION (5 SECTION DOORS ONLY)



INTERMEDIATE I SECTION

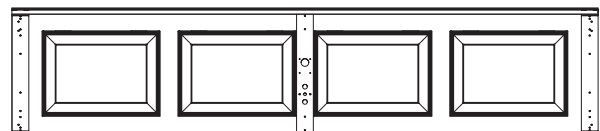

LOCK SECTION

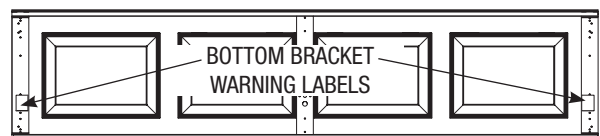


ASTRAGAL BOTTOM SECTION


Tools Required




POWER DRILL




PENCIL




RATCHET WRENCH




PLIERS/WIRE CUTTERS



3/8", 7/16" SOCKET DRIVER




GLOVES




PHILLIPS HEAD SCREWDRIVER




1/2" & 9/16" SOCKET




9/32", 1/2", 5/16", 3/16" & 1/8" DRILL BITS




VICE GRIPS




1/4", 3/8", 7/16", 1/2" & 9/16" WRENCHES




HAMMER




(2) SAWHORSES




LEVEL




TAPE MEASURE




(2) VICE CLAMPS



FLAT TIP SCREWDRIVER



SAFETY GLASSES

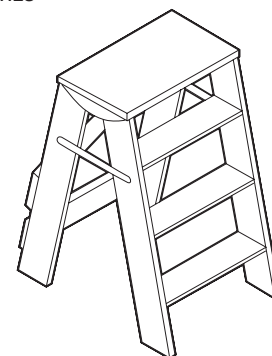

STEP LADDER

Removing An Old Door

⚠ WARNING

IF YOUR COUNTERBALANCE SYSTEM IS OTHER THAN THOSE MENTIONED, DO NOT ATTEMPT TO WORK ON IT, BUT HAVE A QUALIFIED DOOR AGENCY PERFORM THE WORK. OTHERWISE, SEVERE OR FATAL INJURY COULD RESULT.

⚠ WARNING

DISCONNECT AND REMOVE ANY ELECTRIC OPENER PRIOR TO REMOVAL OF COUNTERBALANCE SYSTEMS TO PREVENT UNINTENDED DOOR OPERATION. OTHERWISE, SEVERE OR FATAL INJURY COULD RESULT.

⚠ WARNING

COUNTERBALANCE SPRING TENSION MUST BE RELIEVED BEFORE REMOVING ANY HARDWARE. A POWERFUL SPRING RELEASING IT'S ENERGY SUDDENLY CAN CAUSE SEVERE OR FATAL INJURY.

⚠ WARNING

IF YOU HAVE BACK PROBLEMS DO NOT ATTEMPT THIS, OR SEVERE INJURY COULD RESULT

⚠ WARNING

REMOVING AN EXISTING DOOR CAN BE DANGEROUS. FOLLOW INSTRUCTIONS ON PAGES 6-10 "REMOVING AN OLD DOOR/PREPARING THE OPENING" CAREFULLY, OTHERWISE, SEVERE OR FATAL INJURY COULD RESULT.

If you have an existing door, follow the instructions below to identify which counterbalance removal is necessary. The process of removing an existing door begins by identifying it's counterbalance system. If you are not removing an existing door, proceed to PREPARING THE OPENING on page 10. Generally, you will find three (3) types of counterbalance systems: Extension Spring, Wayne-Dalton® exclusive TorqueMaster® and Torsion counterbalance system, see pages 6-9.

For more technical information regarding the opening preparation, installation and use of your garage door and opener, you can go to www.dasma.com and click on Publications and then Technical Data Sheet.

P1

Torsion Spring Removal For Standard Lift

Tools Needed:

Recommended
tools from
page 5

WARNING

FAILURE TO USE APPROVED WINDING BARS CAN CAUSE SPRING ENERGY TO BE RELEASED SUDDENLY, RESULTING IN SEVERE OR FATAL INJURY.

WARNING

COUNTERBALANCE SPRING TENSION MUST BE RELIEVED BEFORE REMOVING ANY HARDWARE. A POWERFUL SPRING RELEASING IT'S ENERGY SUDDENLY CAN CAUSE SEVERE OR FATAL INJURY.

Do not release the torsion spring tension unless you are a qualified and experienced door technician. Instead have a professional door agency release the tension.



Step 1: Close the door and place vice clamps on the back legs of both vertical tracks, above the third roller to prevent the door from lifting as you unwind the springs. Use only approved winding bars available from your dealer. Do not use undersized steel rods, screw drivers or anything else to unwind the springs. Position the ladder just off to the side of the winding cone. The winding cone should be easy to reach without putting your body directly in front of it.

Step 2: Insert a winding bar into one of the holes in the winding cone. Exert upward pressure. Using caution, loosen the two (2) set screws in the winding cone. Be prepared to support the full torsional force of the spring when the set screws are loosened.

Step 3: Once set screws are loose, slowly and carefully lower the winding rod until it rests against the door. Insert other winding bar into the upper hole. Push up and remove lower bar. Carefully lower upper winding bar, 1/4 turns at a time until it rests against the door. Repeat process until all tension is relieved. If your door is equipped with two (2) torsion springs, follow the same procedure to relieve tension on the second spring.

Step 4: Remove vice clamps from tracks, unbolt torsion shaft assembly and remove from work area.

NOTE: Continue with "P4" on page 9 after completing this step.

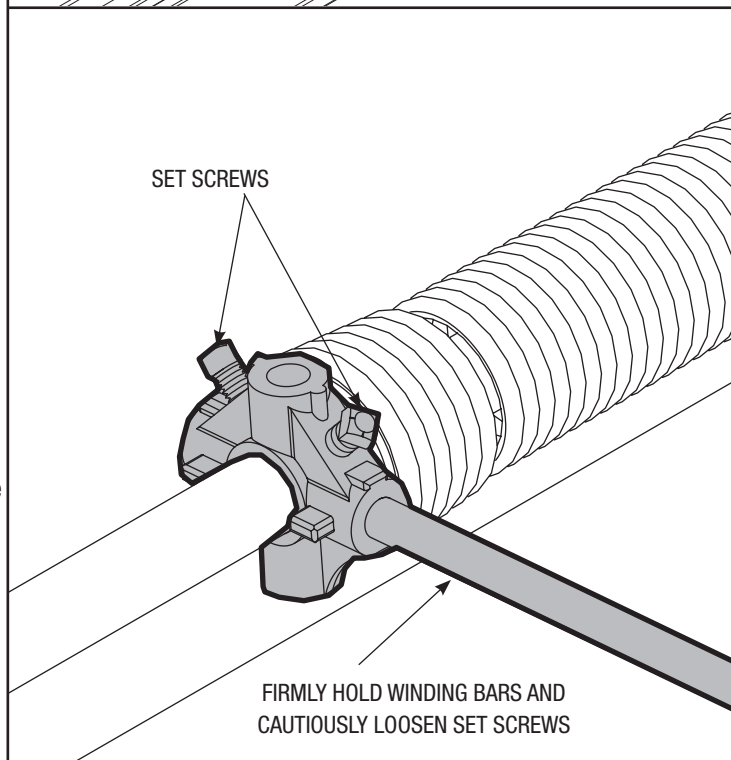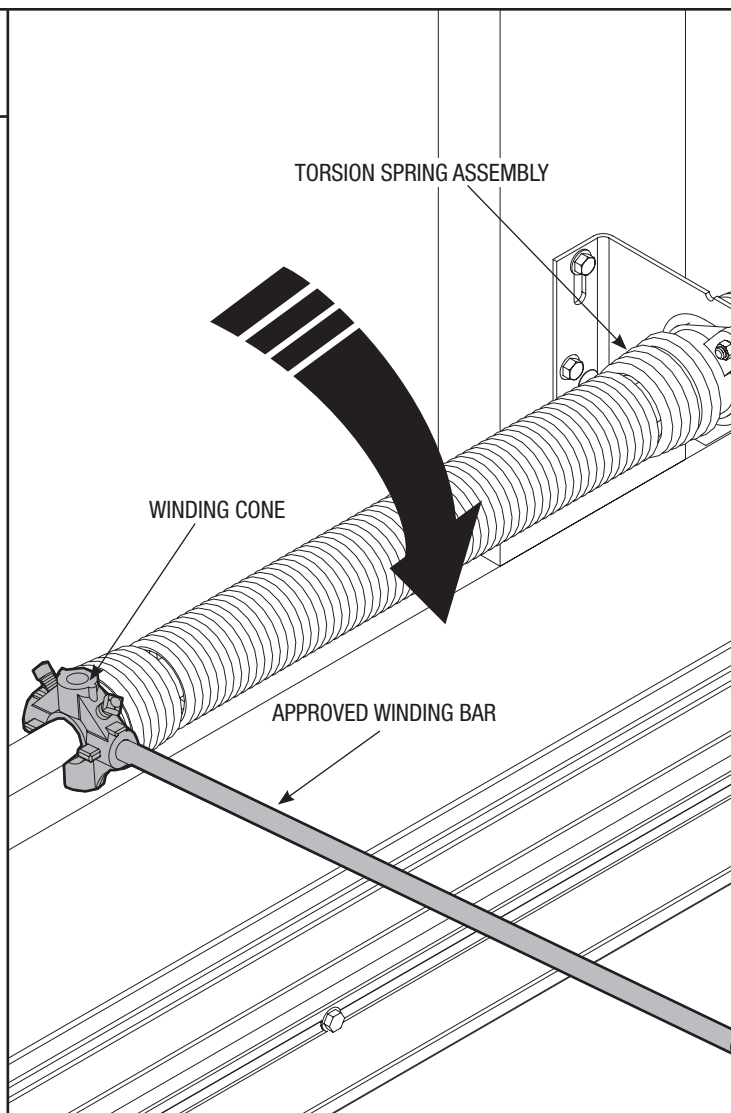

P2

TorqueMaster® Spring Removal

Tools Needed:

Recommended tools from page 5

A TorqueMaster® spring system can be identified by the end brackets. For single spring applications, the right hand end bracket will always have a drive gear, counter gear, counter cover, and a winding bolt head. The left hand end bracket will have no gears, counter cover, or winding bolt head. The hole for the winding bolt head will be plugged.

For double springs, both the right hand and left hand end brackets will always have a drive gear, counter gear, counter cover and a winding bolt head.

IMPORTANT: RIGHT AND LEFT HAND IS ALWAYS DETERMINED FROM INSIDE THE BUILDING LOOKING OUT.

Step 1: If you have a black counter cover: Place a mark on the drive gear tooth and an adjacent mark on the right hand end bracket (Fig. 1). Loosen the lock nut using a 7/16" wrench and continue with step 2.

If you have a gray counter cover: Loosen the lock nut using a 7/16" wrench and continue with step 2.

Step 2: Using an electric drill (High torque / gear reduced to 1300 rpm preferred) with a 7/16" hex head driver, unwind the right hand winding bolt head counterclockwise (Fig. 2) and count the number of turns the mark on the drive gear passes the adjacent mark on the end bracket. Referencing the chart below, by door height, stop unwinding the spring once the counted turns have reached the listed number of turns.

6'-0"	Door Height = 14 turns
6'-3"	Door Height = 14 1/2 turns
6'-5"	Door Height = 15 turns
6'-6"	Door Height = 15 turns
6'-8"	Door Height = 15 1/2 turns
6'-9"	Door Height = 15 1/2 turns
7'-0"	Door Height = 16 turns
7'-3"	Door Height = 16 1/2 turns
7'-6"	Door Height = 17 turns
7'-9"	Door Height = 17 1/2 turns
8'-0"	Door Height = 18 turns

CAUTION: DO NOT USE IMPACT GUN TO UNWIND SPRINGS.

IMPORTANT: DO NOT REFERENCE THE COUNTER COVER WHEN COUNTING THE NUMBER OF TURNS BEING UNWOUND ON THE SPRING, BUT FOLLOW THE INSTRUCTIONS ABOVE.

Step 3: Verify that spring tension has been released by pulling the counterbalance cable on the right hand cable drum away from the header (Fig. 3). If spring tension has been released, the cable will be loose. In addition, the TorqueMaster® Spring Tube should be free to rotate in either direction.

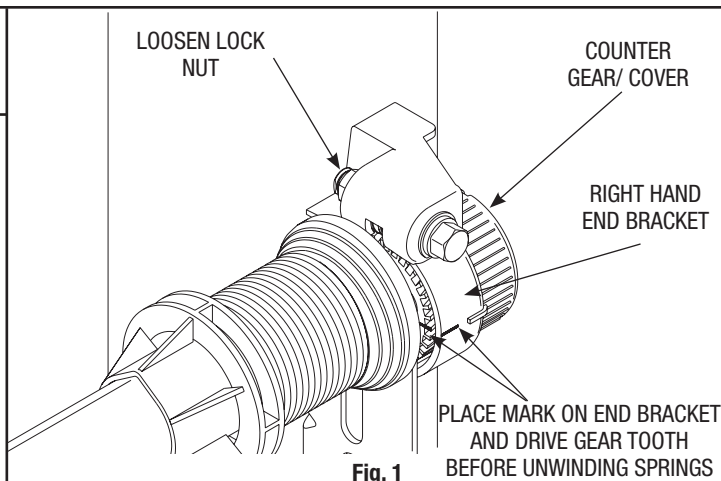


Fig. 1

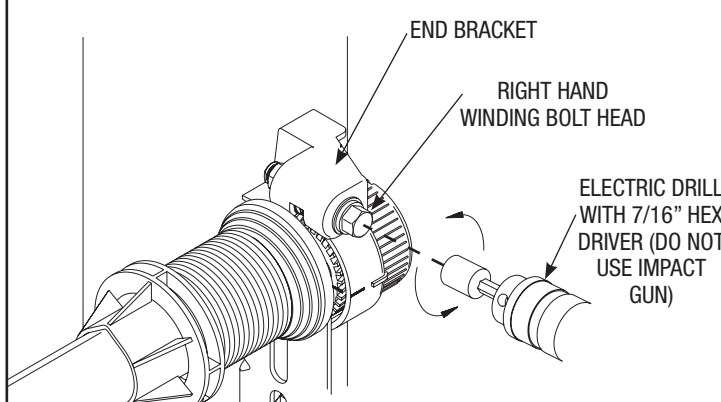


Fig. 2

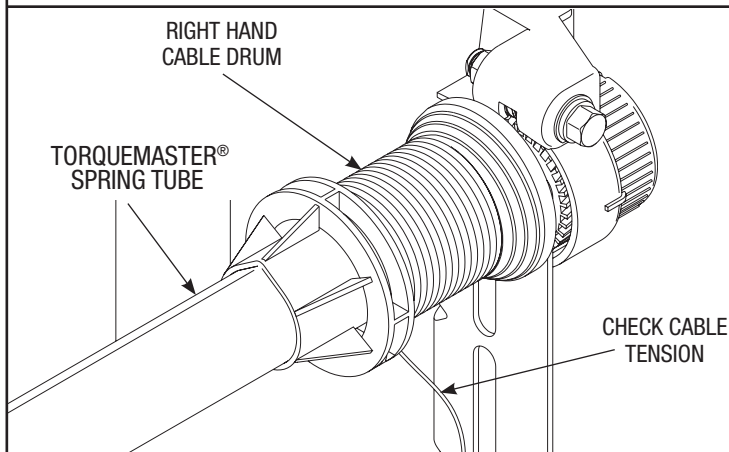


Fig. 3

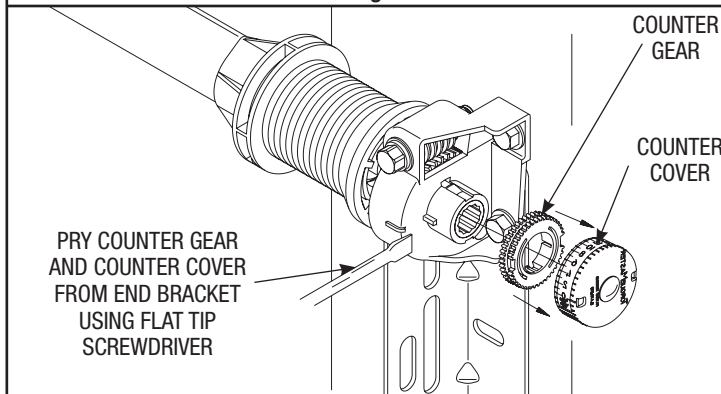
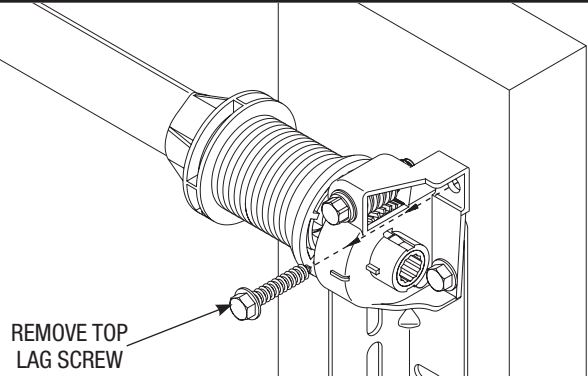
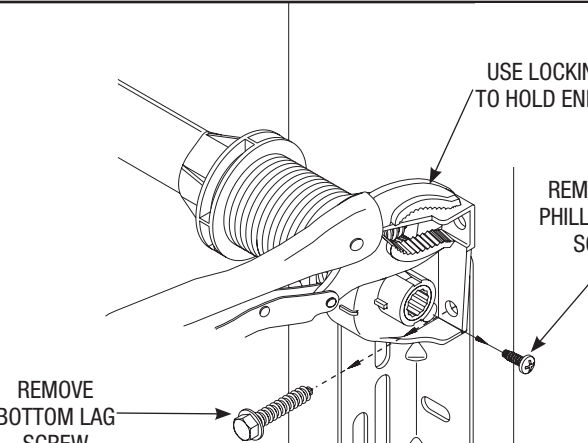
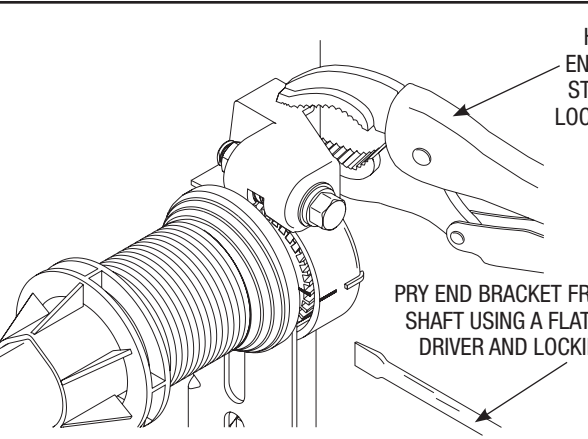
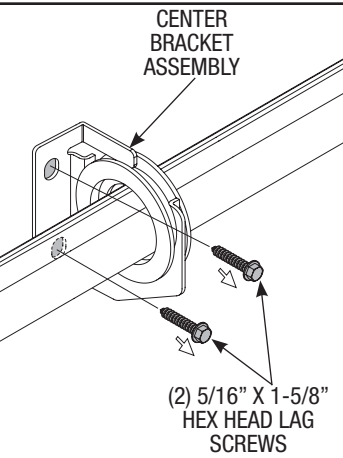
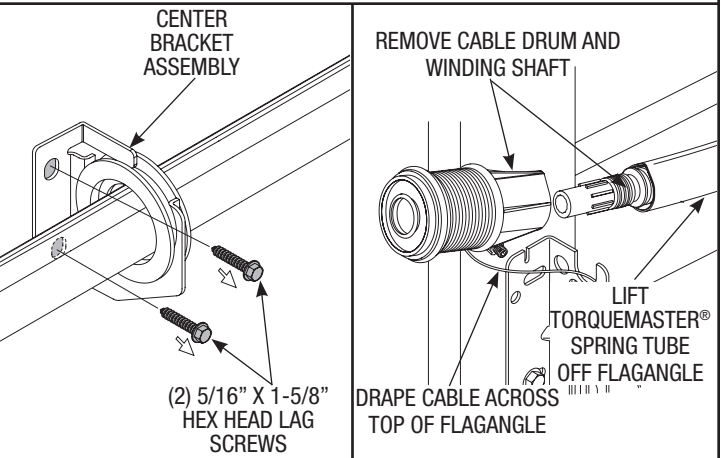


Fig. 4

	TorqueMaster® Spring Removal continued...	 <p>REMOVE TOP LAG SCREW</p> <p>Fig. 5</p>
<p>Tools Needed:</p> <p>Recommended tools from page 5</p>	<p>(Spring Tube should be free to rotate in either direction.) If the counterbalance cable is still taut and the TorqueMaster® Spring Tube is difficult to rotate, that is an indication that spring tension still exists on the left hand spring. Repeat Steps 1 and 2 for releasing spring tension on the left hand side.</p> <p>Step 4: Using a flat tip screwdriver, pry the counter gear and counter cover from the right hand end bracket (Fig. 4 on previous page). Discard the counter gear and counter cover. On double spring applications, repeat for left hand side.</p> <p>Step 5: Remove the upper 5/16" x 1-5/8" lag screw from the right hand end bracket (Fig. 5). Attach locking pliers to the upper portion of the end bracket and hold the housing steady while removing the lower 5/16" x 1-5/8" lag screw and #10 x 1/2" phillips head screw from the end bracket (Fig. 6).</p> <p>Step 6: Holding the right hand end bracket steady with locking pliers, carefully pry the end bracket and drive gear off the winding shaft using a flat tip screwdriver (Fig. 7).</p> <p>CAUTION: THE WINDING SHAFT MAY ROTATE WHEN REMOVING THE END BRACKET AND DRIVE GEAR.</p> <p>Step 7: Repeat Step 4 for the left hand side. Holding the left hand end bracket steady with locking pliers, carefully pry the end bracket off the winding shaft using a flat tip screwdriver (Fig. 7).</p> <p>Step 8: Remove the two (2) lag bolts attaching the center bracket assembly to the header board (Fig. 8).</p> <p>Step 9: Lift the right hand side of the TorqueMaster® Spring Tube and slide the cable drum off. Realign the groove in the winding shaft with the round notch in the flagangle and drape the counterbalance cable with drum over the flagangle. Lift the left hand side of the TorqueMaster® Spring Tube and slide the cable drum and winding shaft off (Fig. 9). Drape the counterbalance cable with drum over the flagangle. Lift the TorqueMaster® spring assembly off the flagangles and out of the doorway. Unhook the counterbalance cables from the bottom brackets and remove all parts from the work area.</p> <p>NOTE: The cable drums may be difficult to remove. If so, twist the cable drum to aid in removal.</p> <p>NOTE: Continue with "P4" on page 9 after completing this step.</p>	 <p>USE LOCKING PLIERS TO HOLD END BRACKET</p> <p>REMOVE #10 PHILLIPS HEAD SCREW</p> <p>REMOVE BOTTOM LAG SCREW</p> <p>Fig. 6</p>
		 <p>HOLD THE END BRACKET STEADY WITH LOCKING PLIERS</p> <p>PRY END BRACKET FROM WINDING SHAFT USING A FLAT TIP SCREW DRIVER AND LOCKING PLIERS</p> <p>Fig. 7</p>
	 <p>CENTER BRACKET ASSEMBLY</p> <p>(2) 5/16" X 1-5/8" HEX HEAD LAG SCREWS</p> <p>Fig. 8</p>	 <p>REMOVE CABLE DRUM AND WINDING SHAFT</p> <p>LIFT TORQUEMASTER® SPRING TUBE OFF FLAGANGLE</p> <p>DRAPE CABLE ACROSS TOP OF FLAGANGLE</p> <p>Fig. 9</p>

P3

Extension Spring Removal


Tools Needed:
Recommended
tools from
page 5

Step 1: Raise the door to the fully open position and place vice clamps to the back legs of both vertical tracks, below the bottom rollers to prevent the door from falling. By opening the door you release most of the spring tension. Carefully unfasten the S-hook from the horizontal angle. Remove cable, sheave and extension spring. Repeat for the other side. If safety cables are running through the extension springs, remove them also. Remove parts from work area.

Step 2: Holding door in the open position, remove the vice clamps, be prepared to support the entire weight of the door. Garage doors can weigh 200-400 pounds.

With assistance, carefully lower the door, by grasping the door firmly by it's lift handles. Do not place fingers or hands near joints, between sections, or between bottom of door and floor. Otherwise, severe injury could result.

NOTE: Continue with "P4" on page 9 after completing this step.

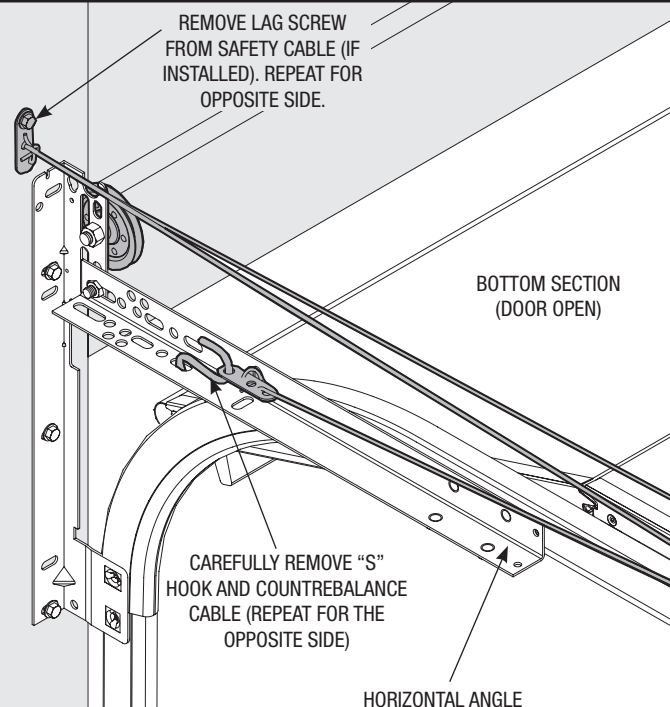

P4

Removing the Old Door

Tools Needed:
Recommended
tools from
page 5


Having removed the counterbalance system, the door can now be disassembled.

Start by first removing the top row of hinges.

With assistance, hold the top section to keep it from falling and remove the top brackets. With assistance, lift the top section out of the opening and remove it from the work area. Repeat for all remaining sections.

After door is disassembled, unbolt both track assemblies from the jambs and remove all material from the work area. You can neatly dispose of the old door by placing it in the carton of your new door.

Clean up area and complete "Preparing the Opening" "P5" on page 10 before installing the new door.

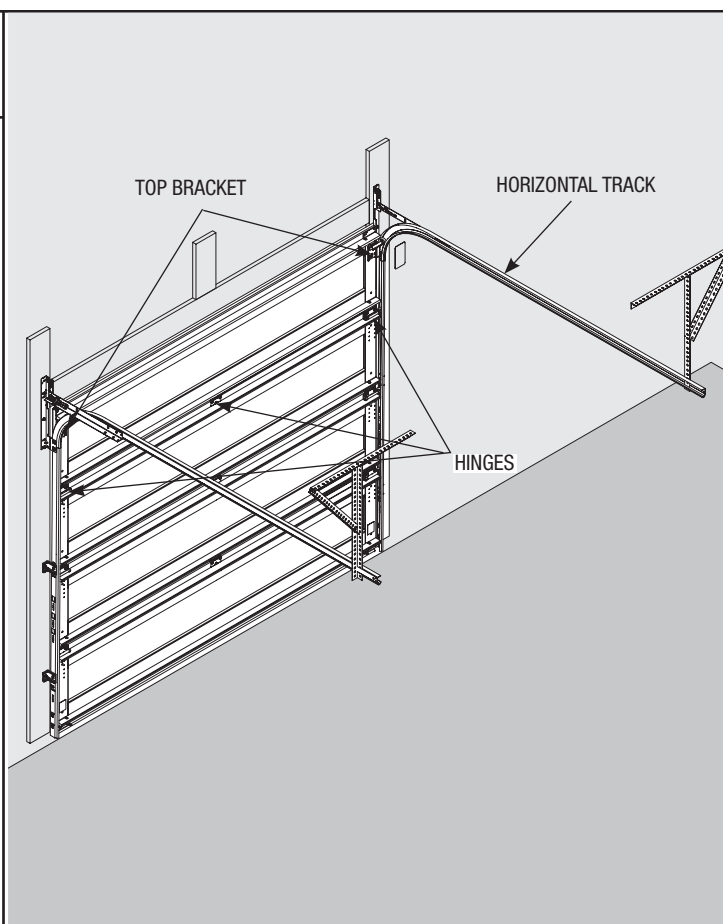

P5

Preparing the Opening

Tools Needed:
Recommended
tools from
page 5

⚠ WARNING FAILURE TO SECURELY ATTACH A SUITABLE MOUNTING PAD TO STRUCTURALLY SOUND FRAMING COULD CAUSE SPRINGS TO VIOLENTLY PULL MOUNTING PAD FROM WALL, RESULTING IN SEVERE OR FATAL INJURY.

If you just removed your existing door or you are installing a new door, complete all steps in PREPARING THE OPENING.

For detailed technical information regarding the opening preparation, refer to the DASMA Technical Data Sheet TDS #161 Connecting Garage Door Jambs to Building. Framing located at www.dasma.com.

The inside of your garage door opening should be framed with wood jambs and header. It is recommended that 2" x 6" lumber be used. The jambs must be plumb and the header level. The jambs should extend a minimum of 12" (305 mm) above the top of the opening for TorqueMaster® counterbalance systems. For low headroom applications, the jambs should extend to the ceiling height. Minimum side clearance required, from the opening to the wall, is 3-1/2".

IMPORTANT: CLOSELY INSPECT JAMBS, HEADER AND MOUNTING SURFACE. ANY WOOD FOUND NOT TO BE SOUND, MUST BE REPLACED.

The jambs and header must be securely fastened to sound framing members. Do not place jambs and header over drywall, paneling, etc. Heads of fasteners must be flush or below jamb and header surface, so they do not interfere with installation or operation of new door.

TorqueMaster® counterbalance systems, a suitable mounting surface must be firmly attached to the wall, above the header at the center of the opening.

The mounting surface must be 2" x 6" lumber minimum (Select southern yellow pine lumber. Do not use lumber marked as spruce-pine-fur or SPF).

The mounting surface must be securely attached to block or concrete wall with four (4) 3/8" masonry anchors or four (4) 5/16" x 4" lag screws for a wood structure.

NOTE: Drill a 3/16" pilot hole in the mounting surface to avoid splitting the lumber. Do not attach the mounting surface with nails.




WEATHER SEAL: Fit weather seal (may not be included) to fit the jambs and header. Align the edge of the weather seals an 1/8" to 1/4" inside the edge of the opening. Temporarily nail the weather seal to the jambs to keep the bottom section from falling out of the opening during installation. Equally space nails approximately 12" to 18" apart.

NOTE: Do not permanently attach weather seal to the jambs at this time. Permanent installation will be done in Step 34.

HEADROOM REQUIREMENT: Headroom is defined as the space needed above the top of the door for tracks, springs, etc. to allow the door to open properly. If the door is to be motor operated, 2-1/2" (64 mm) of additional headroom is required.

NOTE: 6" LHR Conversion Kit is available for 12" Radius only. Contact your local Wayne-Dalton® dealer.

BACKROOM REQUIREMENT: Backroom is defined as the distance needed from the opening back into the garage to allow the door to open fully.

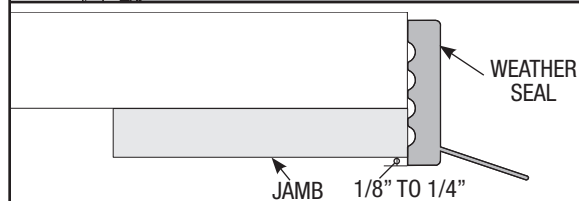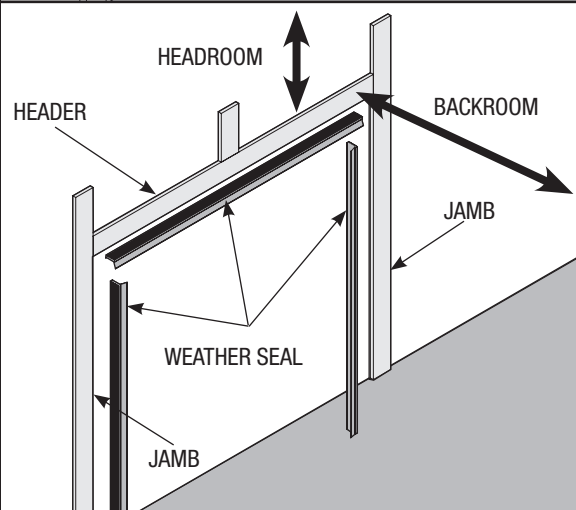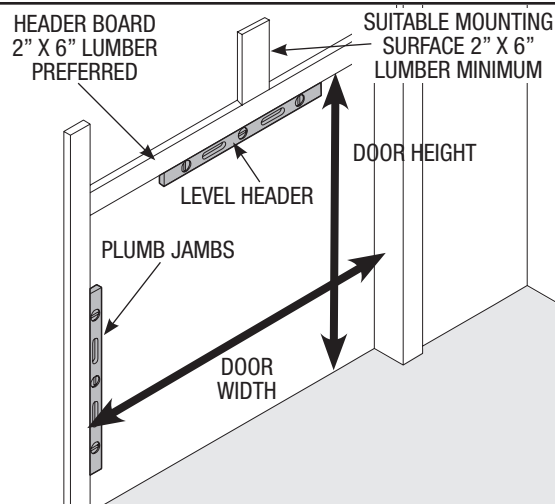

HEADROOM REQUIREMENT

TRACK TYPE	TorqueMaster®
10", 12"	10"
14"	12"
3-1/2" LHR	6"
LHR Kit	6 1/2"

BACKROOM REQUIREMENT

DOOR HEIGHT	TRACK	MANUAL LIFT	MOTOR OPERATED
6'5"	10", 12", 14" Radius	89"	120"
6'5"	Low Headroom	101"	120"
6'6"	10", 12", 14" Radius	90"	120"
6'6"	Low Headroom	102"	120"
7'0"	10", 12", 14" Radius	96"	120"
7'0"	Low Headroom	108"	120"
7'6"	10", 12", 14" Radius	102"	132"
7'6"	Low Headroom	114"	132"
8'0"	10", 12", 14" Radius	108"	132"
8'0"	Low Headroom	120"	132"

IMPORTANT: READ INSTRUCTIONS TITLED “P4” “DOOR REMOVAL” ON PAGE 9 AND “P5” “PREPARING THE OPENING” ON PAGE 10 BEFORE ATTEMPTING DOOR INSTALLATION.

IMPORTANT: STAINLESS STEEL OR PT 2000 COATED LAG SCREWS MUST BE USED WHEN INSTALLING CENTER BEARING BRACKETS, END BEARING BRACKETS, JAMB BRACKETS, OPERATOR MOUNTING/SUPPORT BRACKETS AND DISCONNECT BRACKETS ON TREATED LUMBER (PRESERVATIVE-TREATED). STAINLESS STEEL LAG SCREWS ARE NOT NECESSARY WHEN INSTALLING PRODUCTS ON UNTREATED LUMBER.

NOTE: It is recommended that 5/16 x 2” lag screws be pilot drilled using a 3/16” drill bit, and 1/4 x 2” lag screws and 1/4 x 1-1/2” lag screws be pilot drilled using a 1/8” drill bit, prior to fastening.


1




Attaching Fully Adjustable Flagangle to Vertical Track



Tools Needed:
None

NOTE: If you have riveted track, skip this step.

Hand tighten the flagangle to the vertical track using (2) 1/4”- 20 x 5/8” carriage bolts and (2) 1/4”- 20 flange hex nuts. Secure the flange nuts after flagangle spacing is complete (Step 14).

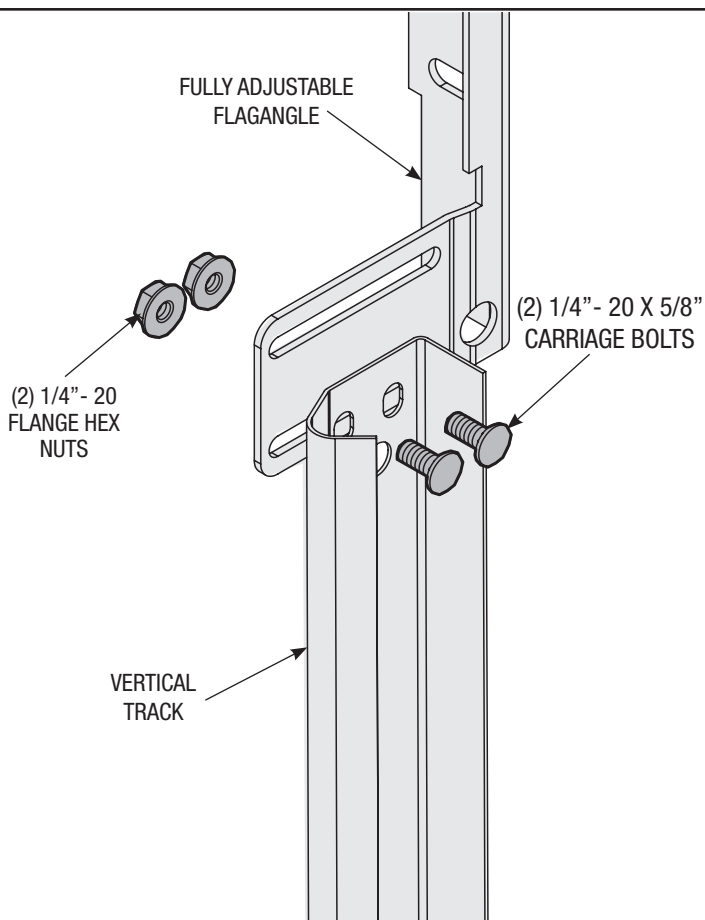
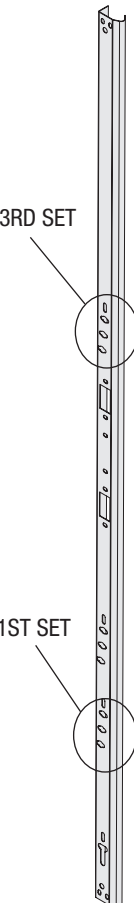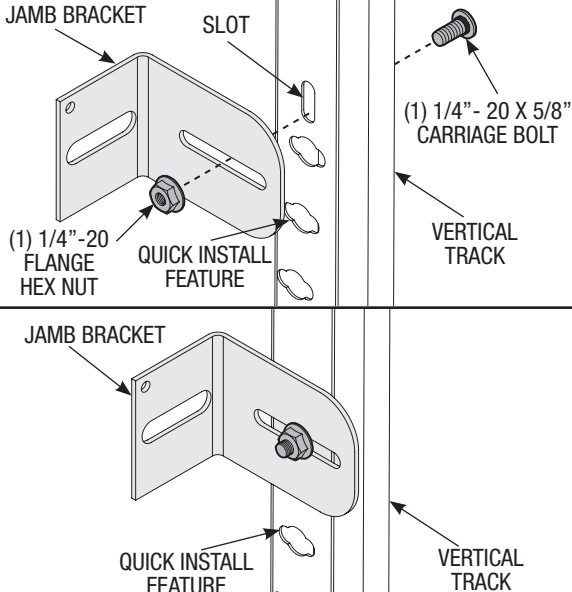
<h1>2</h1>	<h2>Installing Fully Adjustable Jamb Brackets</h2>	 <p>FULLY ADJUSTABLE JAMB BRACKET</p>	 <p>3RD SET</p> <p>1ST SET</p>
<p>Tools Needed:</p> <p>None</p>	<p>NOTE: If you have riveted track, skip this step.</p> <p>To attach the bottom jamb bracket, JB-2, locate the first set of quick install features of the vertical track. Align the slot in the jamb bracket with the slot above the quick install features in the vertical track. The long side of the bracket is placed against the track. Fasten the jamb bracket finger tight, using (1) 1/4" - 20 x 5/8" carriage bolt and (1) 1/4" - 20 flange hex nut.</p> <p>To attach the top jamb bracket, JB-3, locate the third set of quick install features of the vertical track. Align the slot in the jamb bracket with the slot above the quick install features in the vertical track. The long side of the bracket is placed against the track. Fasten the jamb bracket finger tight, using (1) 1/4" - 20 x 5/8" carriage bolt and (1) 1/4" - 20 flange hex nut.</p>	 <p>JAMB BRACKET</p> <p>SLOT</p> <p>(1) 1/4"-20 FLANGE HEX NUT</p> <p>QUICK INSTALL FEATURE</p> <p>(1) 1/4" - 20 X 5/8" CARRIAGE BOLT</p> <p>VERTICAL TRACK</p>	
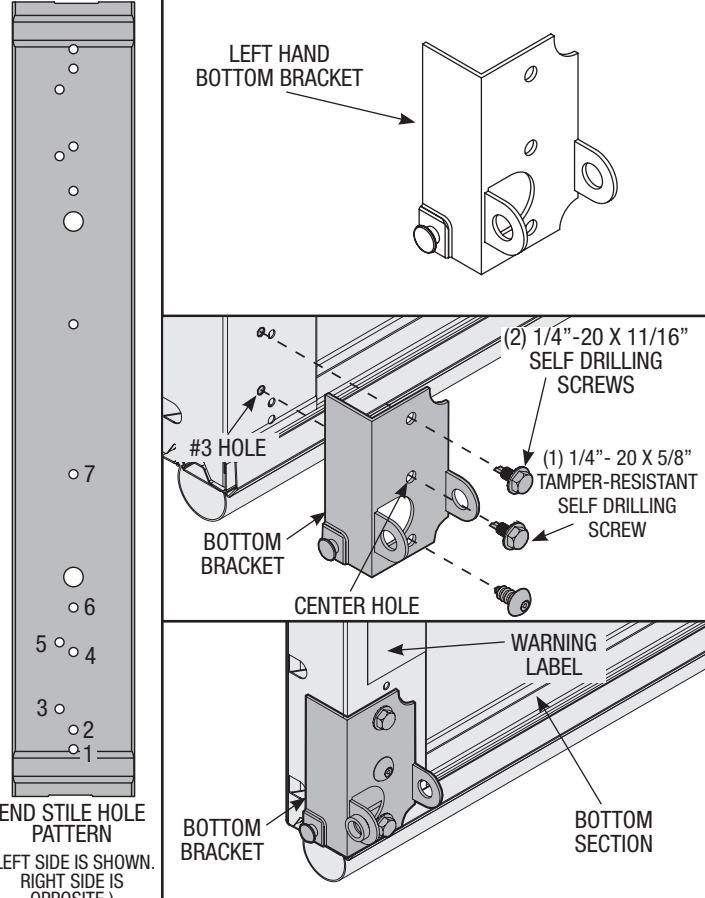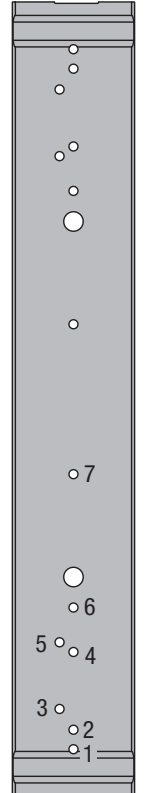
<h1>3</h1>	<h2>Bottom Bracket</h2>	 <p>LEFT HAND BOTTOM BRACKET</p> <p>(2) 1/4"-20 X 11/16" SELF DRILLING SCREWS</p> <p>(1) 1/4" - 20 X 5/8" TAMPER-RESISTANT SELF DRILLING SCREW</p> <p>#3 HOLE</p> <p>BOTTOM BRACKET</p> <p>CENTER HOLE</p> <p>WARNING LABEL</p> <p>BOTTOM SECTION</p>
<p>Tools Needed:</p> <p>Power Drill</p> <p>7/16" Socket Driver</p>	<p>NOTE: For door section identification see page 4.</p> <p>Align the center hole of bottom bracket with hole #3 in the end stile of bottom section. Fasten with (2) 1/4"-20 x 11/16" self drilling screws and (1) 1/4"-20 x 5/8" tamper-proof self drilling screw as shown.</p> <p>Repeat for other side.</p> <p>NOTE: Only doors provided to professional installers, who have required tools will be supplied with a tamper-resistant fastener. Use a 1/4"-20 x 11/16" self drilling screw in the bottom bracket, if not provided with a tamper-resistant screw.</p>	 <p>END STILE HOLE PATTERN (LEFT SIDE IS SHOWN. RIGHT SIDE IS OPPOSITE.)</p>

4

Drums

Tools Needed:
None

IMPORTANT: RIGHT AND LEFT HAND IS ALWAYS DETERMINED FROM INSIDE THE GARAGE LOOKING OUT.

NOTE: For door section identification see page 4.

TorqueMaster® counterbalance drums are marked right and left hand.

Uncoil the counterbalance cables and make sure you place the right hand cable loop on the right hand milford pin and place the left hand cable loop on the left hand milford pin.

Insert a roller into bottom bracket of the bottom section.

Repeat for other side.

NOTE: Verify astragal (bottom seal) is aligned with door section. If there is more than 1/2" excess astragal on either side, trim astragal even with door section.

LEFT HAND
TORQUEMASTER®
COUNTERBALANCE DRUM

BOTTOM SECTION

MILFORD PIN

COUNTERBALANCE
CABLE

BOTTOM
BRACKET

MILFORD PIN

ROLLER

HINGE TUBE

BOTTOM SECTION

ASTRAGAL

INSTALLATION

5

Hinges

Tools Needed:
Power Drill
7/16" Socket
Driver

Locate the lower (numbered) leaf of the #1 end hinges and required center hinges over the #1 and #4 holes in the end stiles for the end hinges and the pre-punched holes in the center stile(s) for the center hinges at the top of the section.

NOTE: The #1 hinges serve as end hinges on the bottom section. The #1 hinges also serve as center hinges at all center hinge locations.

Secure the hinges to the section using (2) 1/4"-14 x 5/8" self tapping screws on each hinge leaf.


Insert roller into appropriate hinge tube.

Repeat for all other sections using the #2 end hinges on the second (lock section) and the #3 end hinges on the third section (intermediate section).


NOTE: #4 End hinges are used on fourth section of five section doors.

IMPORTANT: WHEN PLACING ROLLERS INTO END HINGES NUMBER 2 AND HIGHER, THE ROLLER GOES INTO THE TUBE FURTHEST AWAY FROM SECTION.


IMPORTANT: ONCE FASTENER IS SNUG AGAINST HINGE LEAF, TIGHTEN AN ADDITIONAL 1/4 TO 1/2 TURN TO RECEIVE MAXIMUM DESIGN HOLDING POWER.

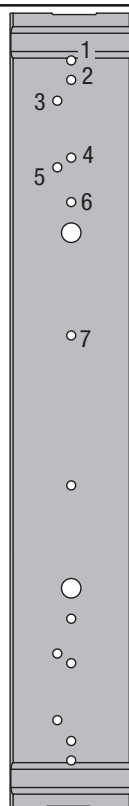


END STILE HOLE PATTERN
(LEFT SIDE IS SHOWN. RIGHT SIDE IS OPPOSITE.)




CENTER STILE HOLE PATTERN

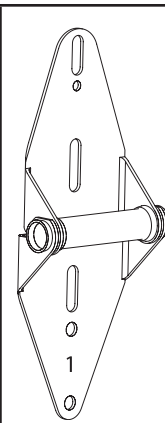


#1 HINGE

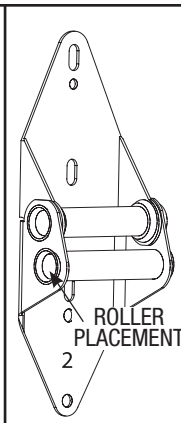


#2 END HINGE

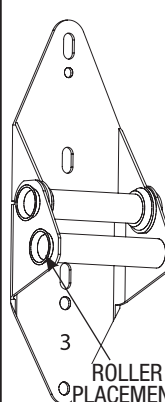


#3 END HINGE

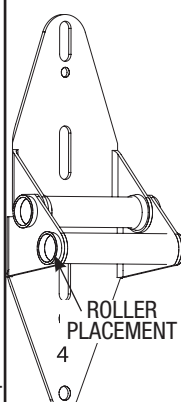

#4 END HINGE

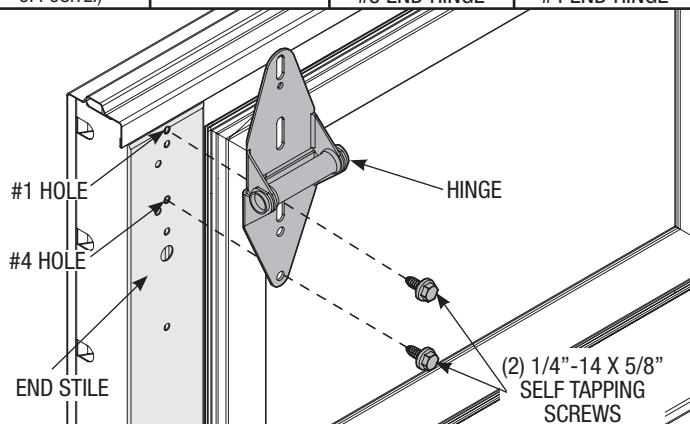

END HINGE PLACEMENT

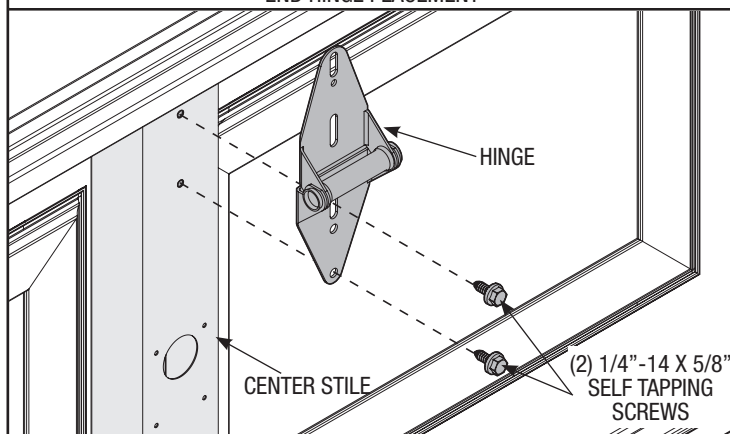

CENTER HINGE PLACEMENT

6

Top Bracket

Tools Needed:

Power Drill

7/16" Socket Driver


Align upper-center hole of top bracket base with #6 hole in the end stile (See end stile hole layout). Loosely secure with (1) 1/4" - 20 x 7/8" self drilling screw.

Ensure top bracket is level and aligned with edge of section. Secure with (4) 1/4" - 20 x 7/8" self drilling screws, one in each corner of the top bracket base.

Remove the 1/4" - 20 x 7/8" self drilling screw installed in the upper-center hole of the top bracket base.

Loosely hand tighten top bracket slide with (1) 1/4" - 20 x 5/8" carriage bolts and (1) 1/4" - 20 flange hex nuts. Insert roller and repeat for other side.

NOTE: For doors with a glazed top section (windows). Top strut may be mounted between #2 and #6 holes before top bracket is installed. See Step 8 for U-Bar installation

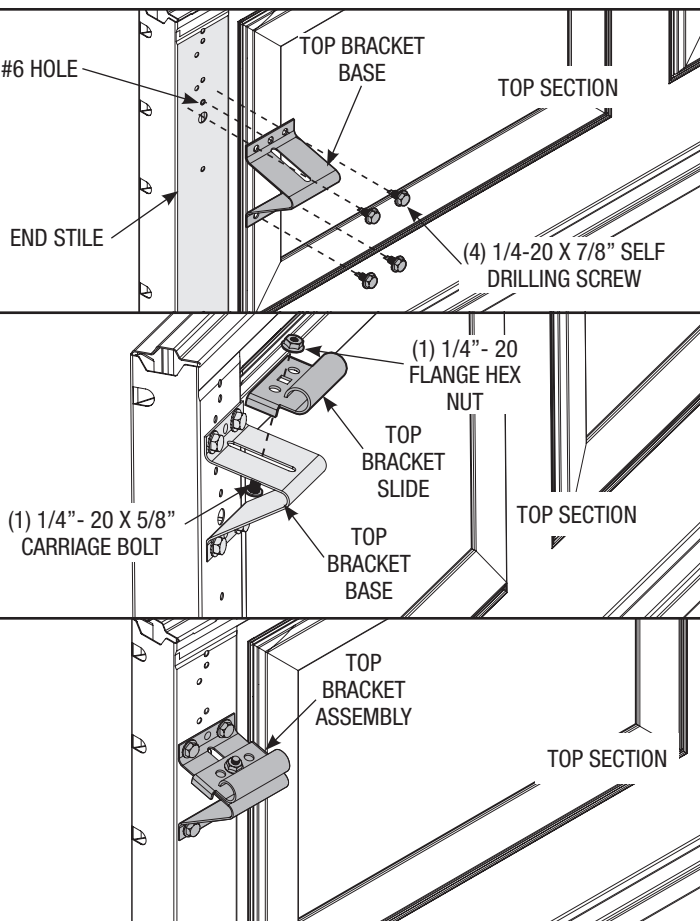

7

Step Plate

Tools Needed:

Pencil

Power Drill


5/16" Drill Bit

Phillips Screwdriver

NOTE: For alternative step/ lift plate installation, see "Step Plate" in the optional installations on page 34.

Locate the center most stile on the bottom section of the door. Using the pre-punched holes at the bottom of the stile as a template, drill (2) 7/32" dia. holes through the section. Using the previously drilled holes as a guide, enlarge the holes from outside the door to 7/16" diameter. Assemble the outside and inside step/lift plates to the section using (2) #8 x 1-5/8" screws.

NOTE: Do not drill through or enlarge holes on the inside of the door.

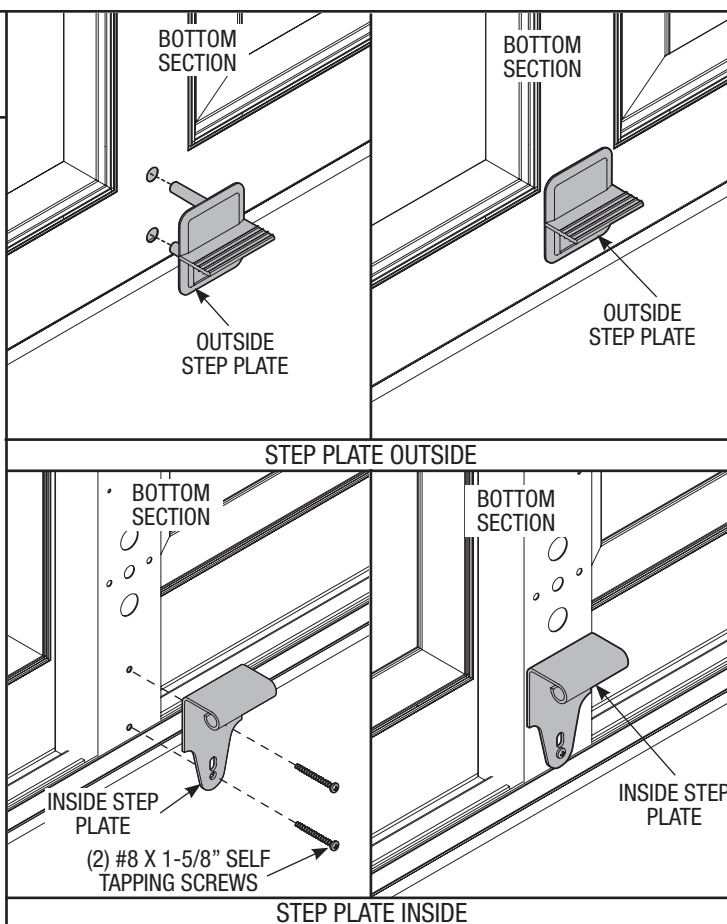

8

U-Bar

Tools Needed:
Power Drill
7/16" Socket Driver

NOTE: For door section identification see page 4.

INSTALLATION ON THE TOP SECTION:

Doors 14'0" wide and over, locate U-Bar above top bracket and secure with (2) 1/4"-20 x 7/8" self drilling screws at each end and center stile location.

NOTE: 3" U-Bars are now supplied with all glazed doors starting at 14'0" width.

INSTALLATION ON ALL OTHER SECTIONS:

NOTE: All U-Bars are placed at the top of the section, against the bottom of the hinges, for the intermediate, lock and bottom sections.

NOTE: For doors 16'1" to 18'0" that have a glazed intermediate section, the U-bar needs to be placed on the glazed intermediate section.

NOTE: All WayneMark™ 8200 doors 14'0" to 16'0" wide, 6'0" to 7'0" high (4 section high only) are now supplied with a 2" U-Bar for the top of the bottom section.

Place the U-Bar on the section against the bottom of the hinges. Center the U-Bar side to side on the section at the location shown, and secure to the section using (2) 1/4"-20 x 7/8" self drilling screws at each end and center stile location.



Model 46 U-Bar Schedule

Door Width	4 Section	5 Section
8'-0" to 14'-11"	N/A	N/A
15'-0" to 16'-0"	(1) 2" U-Bar	(1) 2" U-Bar
16'-1" to 18'-0"	(3) 2" U-Bar	(3) 2" U-Bar

8000 Series U-Bar Schedule



Door Width	4 Section	5 Section
8'-0" to 13'-11"	N/A	N/A
14'-0" to 14'-11"	(1) 2" U-Bar	(1) 2" U-Bar
15'-0" to 16'-0"	(1) 2" U-Bar	(1) 2" U-Bar
16'-0" to 18'-0"	(3) 2" U-Bar	(3) 2" U-Bar

U-BAR PLACEMENT FOR TOP SECTION

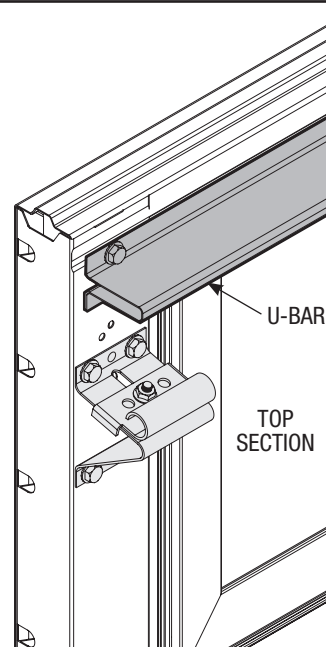
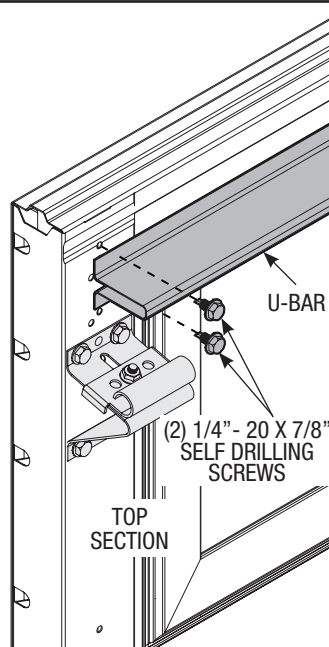


SIDE PROFILE

U-BAR PLACEMENT FOR TOP SECTION

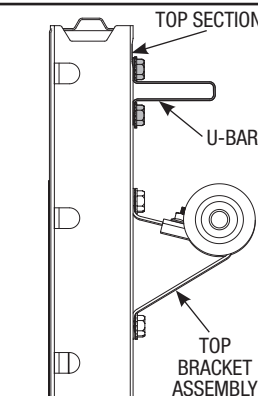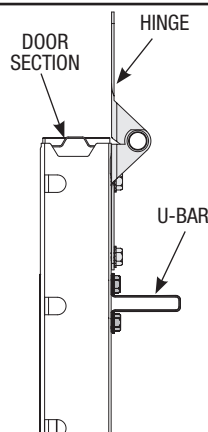

U-BAR PLACEMENT FOR BOTTOM, LOCK AND INTERMEDIATE SECTIONS

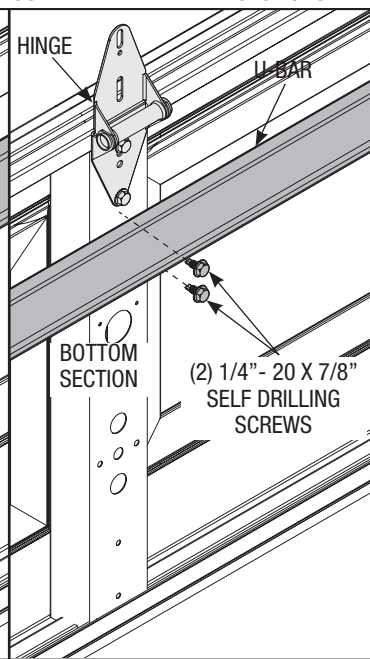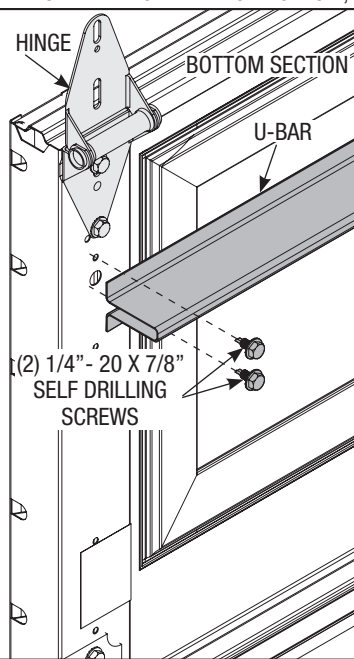

ATTACHING END STILE

ATTACHING CENTER STILE

9

Lift Handle

Tools Needed:
Tape Measure

Pencil

Power Drill

9/32" Drill Bit

1/2" Drill Bit

1/4" Wrench

NOTE: Doors with a Keyed lock do not require this lift handle.

NOTE: For door section identification see page 4.


Locate the inside center stile or the desired lift handle location on the lock (2nd) section of the door. Position the lower hole in the lift handle 4" from the bottom of the second section.

IMPORTANT: The distance between the step/lift plate and the middle of the lift handle must be 20" minimum to 30" maximum. If needed reposition upper lift handle to stay within the required dimension.

Drill (2) 9/32" dia. holes through section. Enlarge the holes from outside the door to 1/2" dia.

Assemble the outside and inside lift handle to the section using (2) 1/4" x 2-1/2" carriage bolts, (2) 1/4" - 20 hex nuts and (2) spacers.

NOTE: Do not drill through or enlarge holes on the inside of the door.

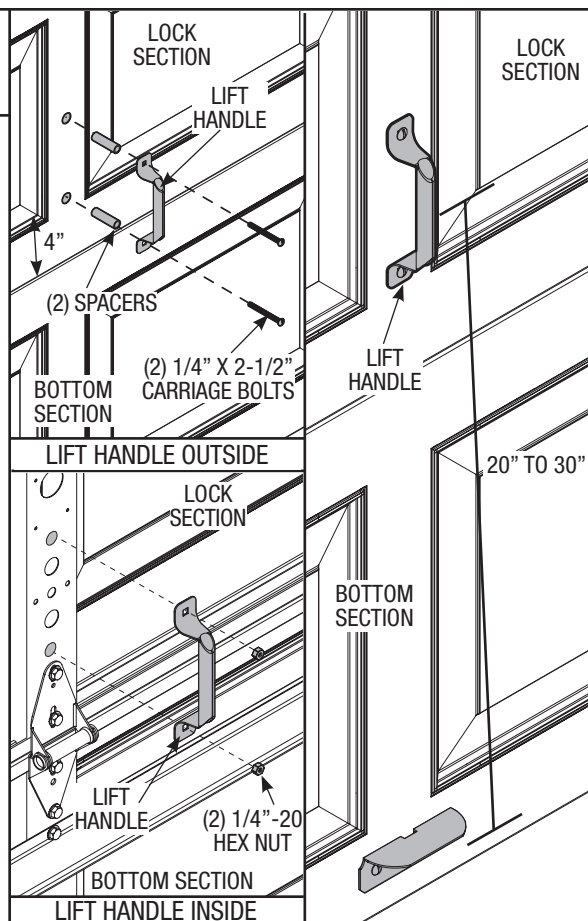

INSTALLATION

10

Bottom Section


Tools Needed:

Level

Wood Shims

Before installing the bottom section, the weather seal (may not be included) must be installed (see PREPARING THE OPENING on page 10)

Center the bottom section in the door opening. Level section using wooden shims under the bottom astragal if necessary. Hold the section in the opening while attaching vertical tracks.

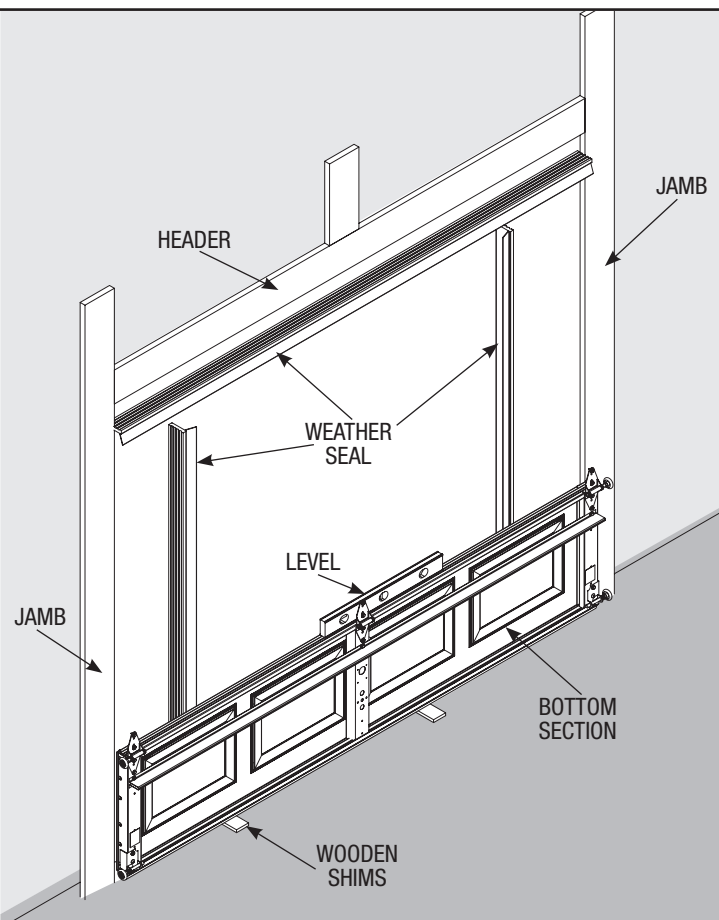

11

Vertical Track

Tools Needed:

3/16" Drill Bit

Power Drill

7/16" Socket Driver

Tape Measure

Level


IMPORTANT: THE TOPS OF THE VERTICAL TRACKS MUST BE LEVEL FROM SIDE TO SIDE. IF THE BOTTOM SECTION WAS SHIMMED TO LEVEL IT, THE VERTICAL TRACK ON THE SHIMMED SIDE, MUST BE RAISED THE HEIGHT OF THE SHIM.

Position the left hand vertical track assembly over the rollers of the bottom section. Make sure the counterbalance cable is located between the rollers and the door jamb. Drill 3/16" pilot holes for the lag screws.

If installing an idrive® opener: Raise the track so that the bottom of the track is 1" higher than the bottom of the door.

For non-idrive® operated garage doors: Install the track so that it is aligned with the bottom of the door.

Loosely fasten jamb brackets and flagangle to the jamb using 5/16" x 1-5/8" hex head lag screws. Tighten bottom jamb bracket lag screw securely to the jamb to maintain 5/8" spacing. Hang cable drum over flagangle. Repeat for the right side.

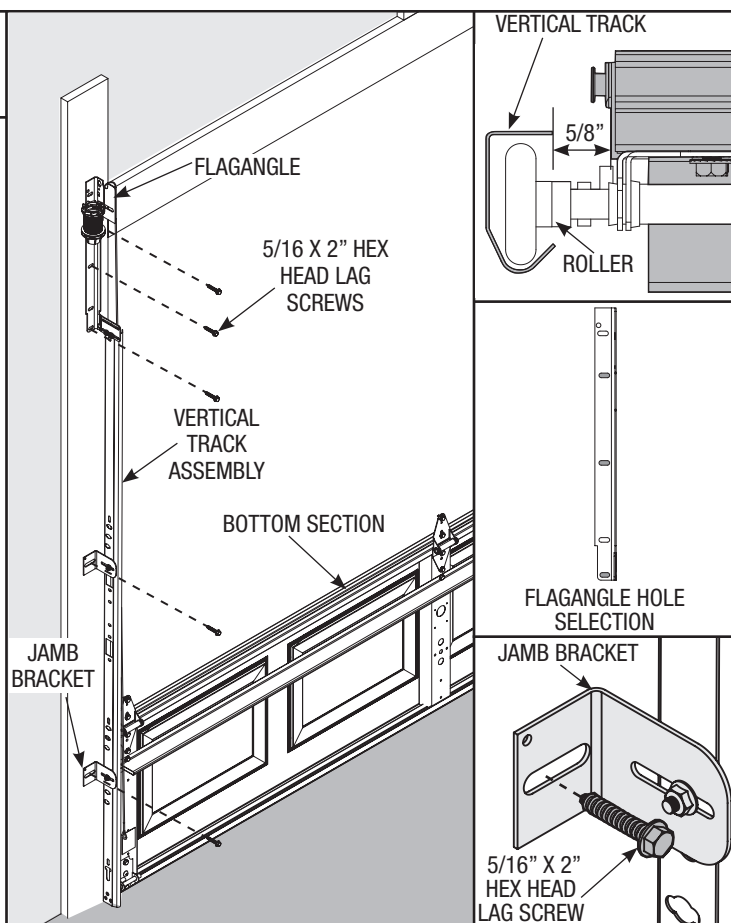

12

Stacking Sections

Tools Needed:

Power Drill


7/16" Socket Driver

NOTE: For door section identification see page 4.

NOTE: Make sure hinges are flipped down, when stacking another section on top.

With assistance, lift second section and guide rollers into the vertical tracks. Keeping the ends of the sections aligned, install remaining section(s), except top section, in same manner. Now flip up hinge leaf, and fastening center hinges first, and end hinges last, using (2) 1/4" - 14 x 5/8" self tapping screws. Repeat for other section(s) except top section.

NOTE: Install lock at this time (sold separately) See instructions in OPTIONAL SIDELOCK INSTALLATION on page 33.

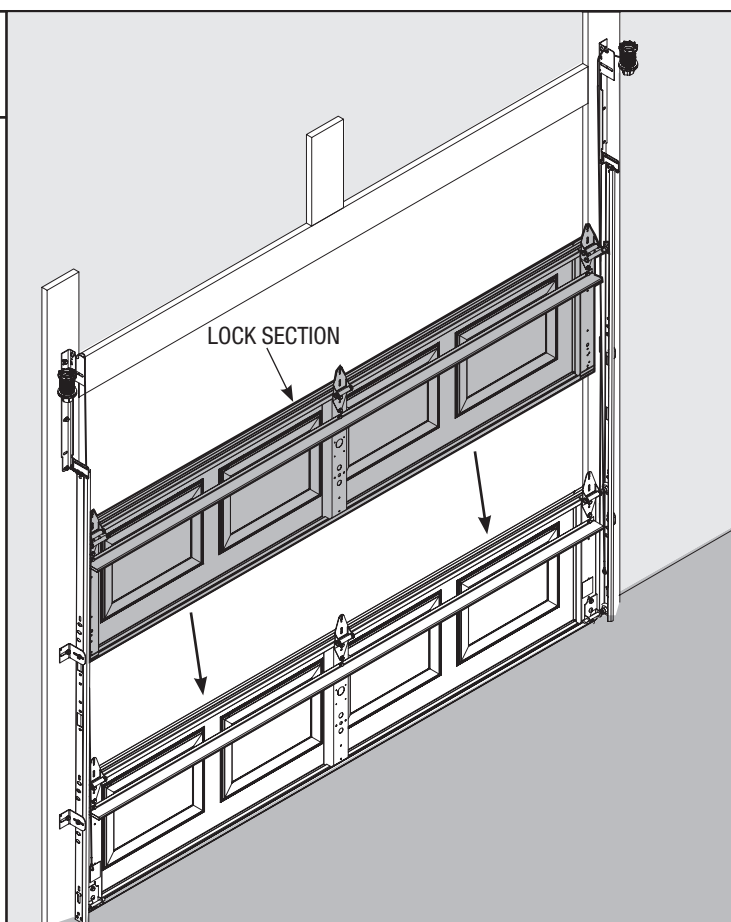

13

Top Section

Tools Needed:
Hammer

Nail


Power Drill

7/16 Socket
Driver

Place the top section in the opening and vertically align with lower sections.

Temporarily secure the top section by driving a nail in the header near the center of the door and bending it over the top section.

Now flip up the hinge leaf against section, fastening center hinges first and end hinges last.

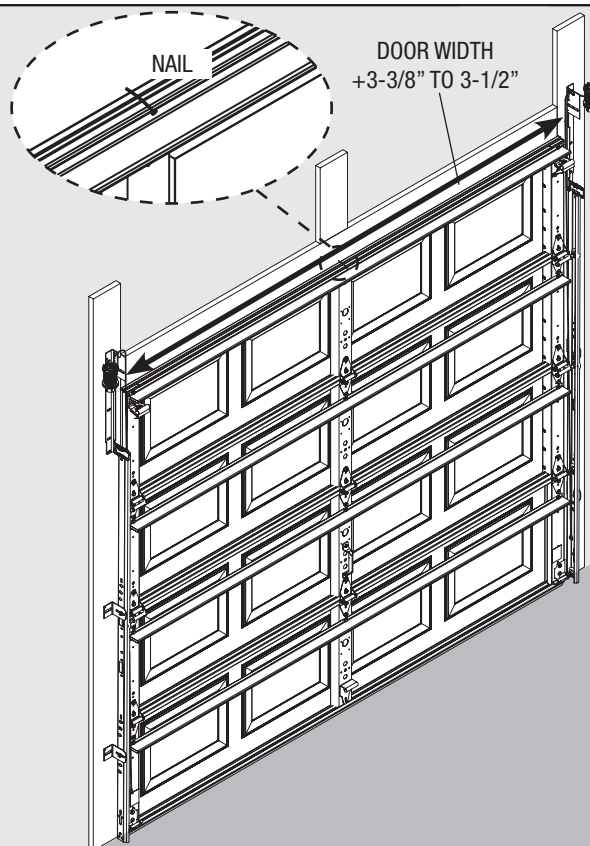

14

Vertical Track

Tools Needed:
Power Drill


7/16 Socket
Driver

Tape Measure

When installing a door with a TorqueMaster® counterbalance system, vertical track alignment is critical. Position flagangle between 1-11/16" (43 mm) to 1-3/4" (44 mm) from the edge of the door. Tighten the bottom lag screw. Flagangles must be parallel to the door sections. Repeat for opposite side.

IMPORTANT: THE DIMENSION BETWEEN THE FLAGANGLES MUST BE DOOR WIDTH PLUS 3-3/8" (86MM) TO 3-1/2" (89 MM) FOR SMOOTH, SAFE DOOR OPERATION.

Complete the vertical track installation by securing the center jamb bracket(s) and tightening the other lag screws. Push the vertical track against the rollers so that the rollers are touching the deepest part of the curved side of the track (see illustration). Tighten all the track bolts and nuts. Repeat for opposite side.

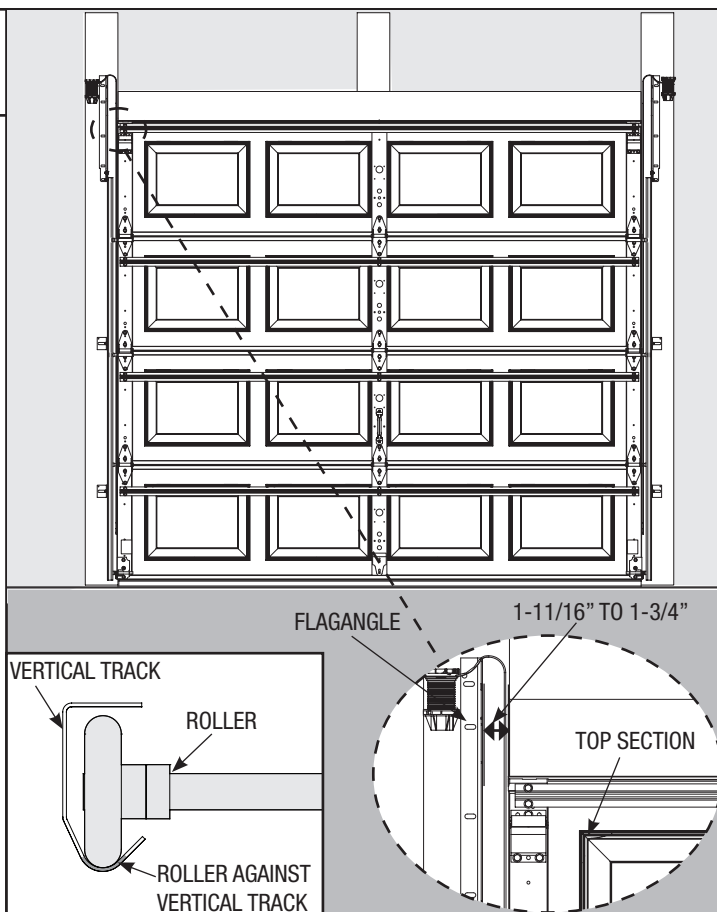

15

Horizontal Track

Tools Needed:

9/16" Socket

Ratchet Wrench

9/16" Wrench

Level

To install horizontal track, place the curved end over the top roller. Align the bottom of the horizontal track with the vertical track. Hand tighten the horizontal track to the flagangle with (2) 1/4"-20 x 5/8" carriage bolts and (2) 1/4"-20 flange hex nuts.


Level the horizontal track assembly and bolt the horizontal angle to the slot in the flagangle using (1) 3/8"-16 x 3/4" hex head bolt and (1) 3/8"-16 hex nut. Repeat for other side. Remove the nail that was temporarily holding the top section in place, installed in Step 13.

IMPORTANT: FAILURE TO REMOVE NAIL BEFORE ATTEMPTING TO RAISE DOOR COULD CAUSE PERMANENT DAMAGE TO TOP SECTION.

WARNING

DO NOT RAISE DOOR UNTIL HORIZONTAL TRACKS ARE SECURED AT REAR, AS OUTLINED IN STEP 34, OR DOOR COULD FALL FROM OVERHEAD POSITION CAUSING SEVERE OR FATAL INJURY.

NOTE: If an iDrive® opener will be installed, position horizontal tracks slightly above level.

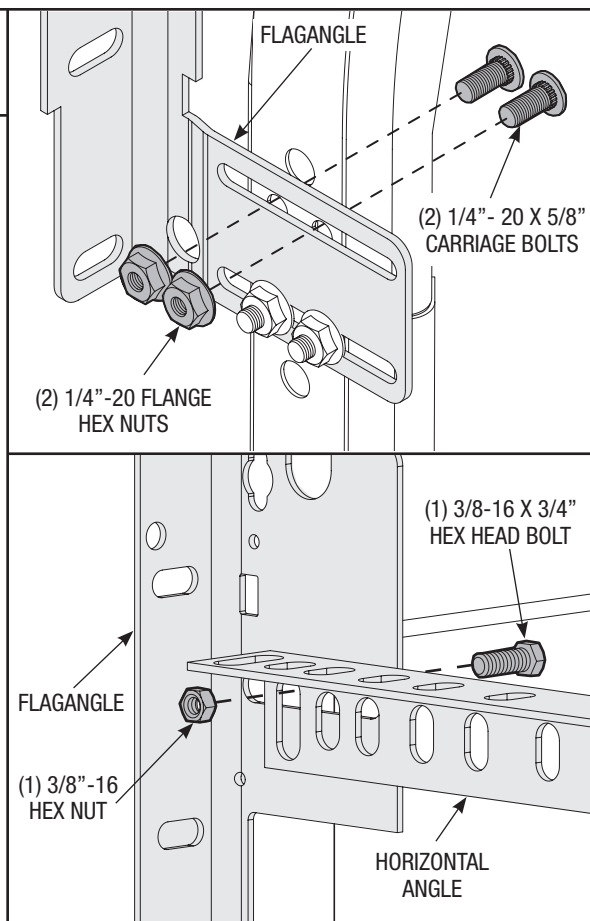

16

Adjusting Top Brackets


Tools Needed:


7/16" Wrench


With horizontal tracks installed you can adjust the top brackets.

Vertically align the top section with the lower sections. Once aligned, position the top roller in the top bracket slide out against the horizontal track. Maintaining the slide's position, tighten 1/4"-20 flange hex nut to secure the top bracket slide to the top bracket base.

Repeat for other side.

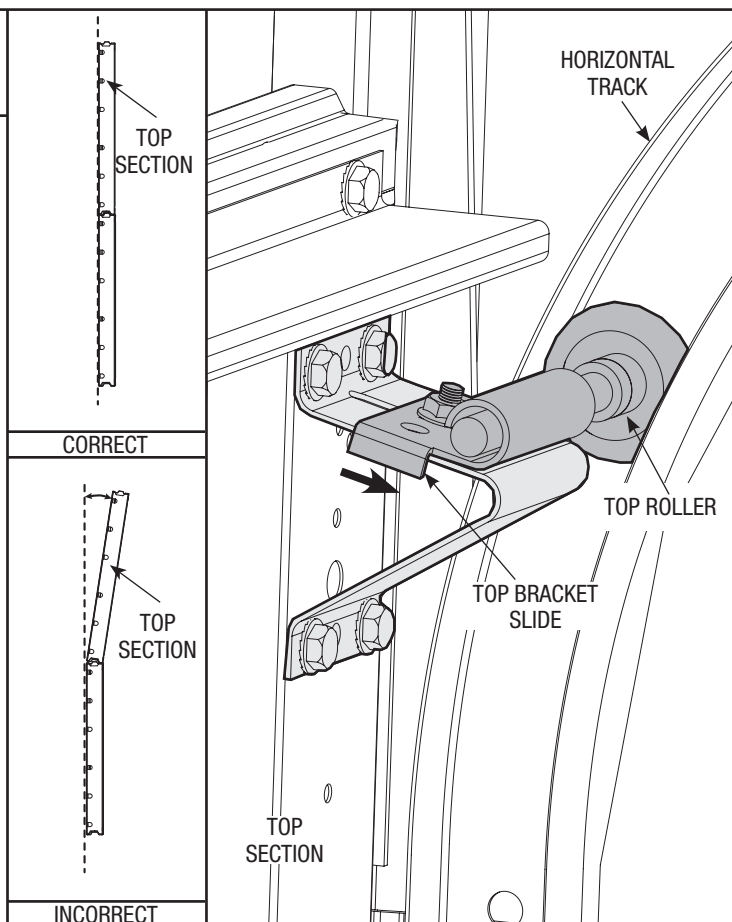
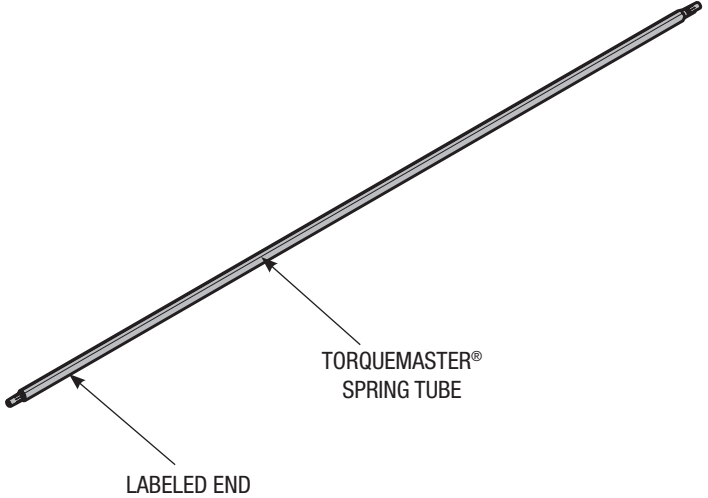
<h1>17</h1>	<h2>TorqueMaster® Spring Tube</h2>	
<p>Tools Needed: None</p>	<p>TorqueMaster® springs come lubricated and pre-assembled inside the TorqueMaster® spring tube. To install, lay the TorqueMaster® spring tube on the floor (inside garage) in front of the door with the labeled end to the left.</p> <p>IMPORTANT: RIGHT AND LEFT HAND IS ALWAYS DETERMINED FROM INSIDE THE GARAGE LOOKING OUT.</p>	
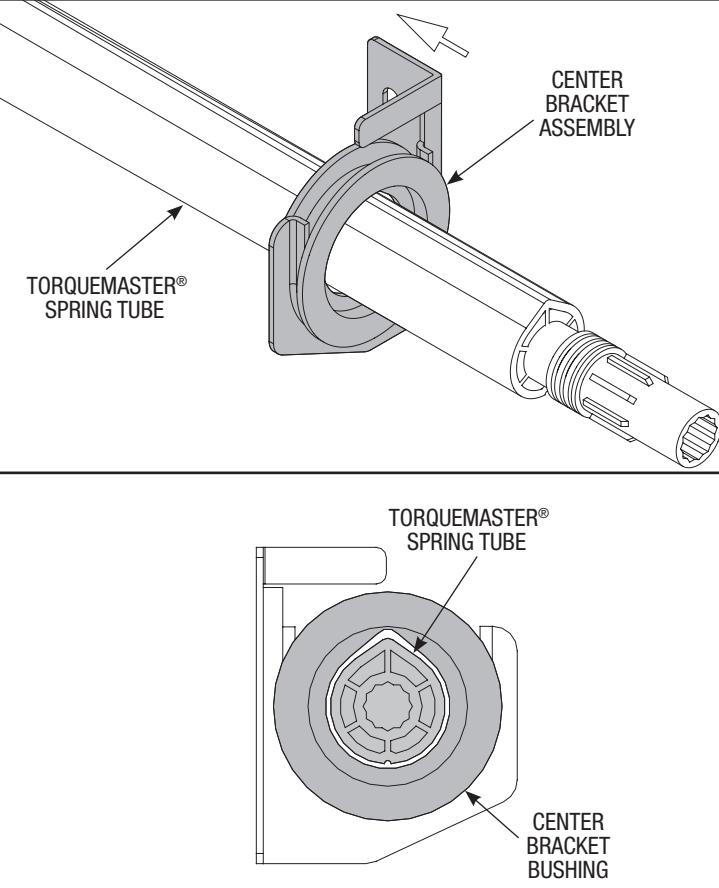
<h1>18</h1>	<h2>Center Bracket Bushing</h2>	
<p>Tools Needed: None</p>	<p>NOTE: If you are installing an <i>i</i>drive® opener on your garage door, skip this step and continue with Step 19.</p> <p>NOTE: If you are not installing an <i>i</i>drive® opener on your garage door, you must install the center bracket bushing assembly. Follow these instructions for non-<i>i</i>drive® operated garage doors.</p> <p>NOTE: If you are installing a DoorMaster™ opener, see optional DoorMaster™ Bracket installations on page 33, figure A.</p> <p>Being cam shaped the center bracket bushing only fits one way.</p> <p>Slide the center bracket assembly towards the center of the torque tube, from the right side as shown.</p> <p>NOTE: Upon completion of this step, continue with Step 20.</p>	

Tools Needed:
None

NOTE: See iDrive® main installation and owner's manual for iDrive® parts.

IMPORTANT: RIGHT AND LEFT HAND IS ALWAYS DETERMINED FROM INSIDE THE GARAGE LOOKING OUT.

Lay the TorqueMaster® spring tube on the floor (inside garage) in front of the door with the labeled end to the left.

Look into the opener's left side to ensure the left hand bearing and the internal (black) sleeve are aligned with the TorqueMaster® spring tube profile.

IMPORTANT: HOLD OPENER BY THE MAIN BODY. DO NOT HOLD BY THE MOTOR.

NOTE: Opener will not slide over the TorqueMaster® spring tube label. Attempting to slide opener over the left end of the TorqueMaster® spring tube can damage the internal electronics.





Once aligned, slide the opener onto the right hand end of the TorqueMaster® spring tube. As the right end of the TorqueMaster® spring tube enters the internal (black) sleeve, rotate the opener back and forth slightly to help aid alignment.

Continue sliding the opener onto the TorqueMaster® spring tube. Align the right hand bearing with the TorqueMaster® spring tube and slide the opener completely onto the TorqueMaster® spring tube until the TorqueMaster® spring tube exits the opener right hand bearing.

NOTE: Do not force the opener onto the TorqueMaster® spring tube if misalignment occurs.

Continue sliding the opener to the center of the TorqueMaster® spring tube.

Plug the motor power cord into the opener.

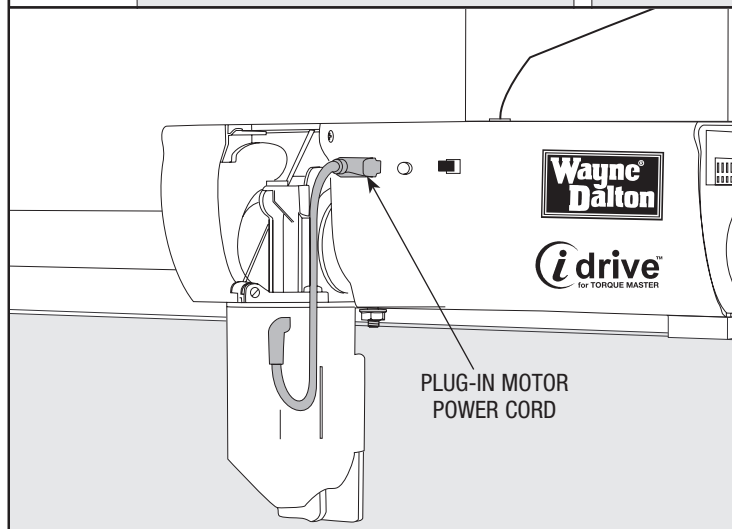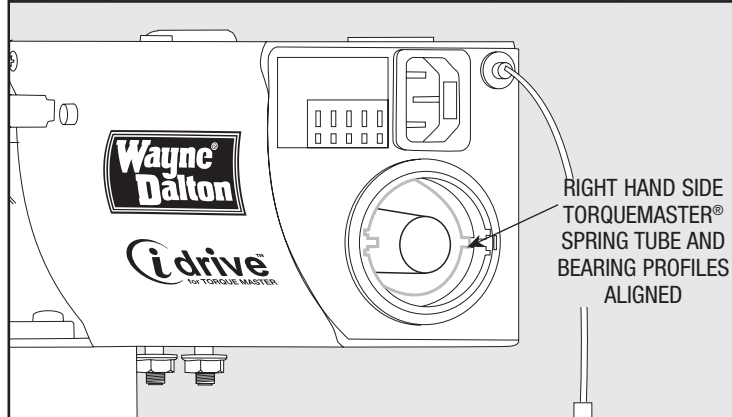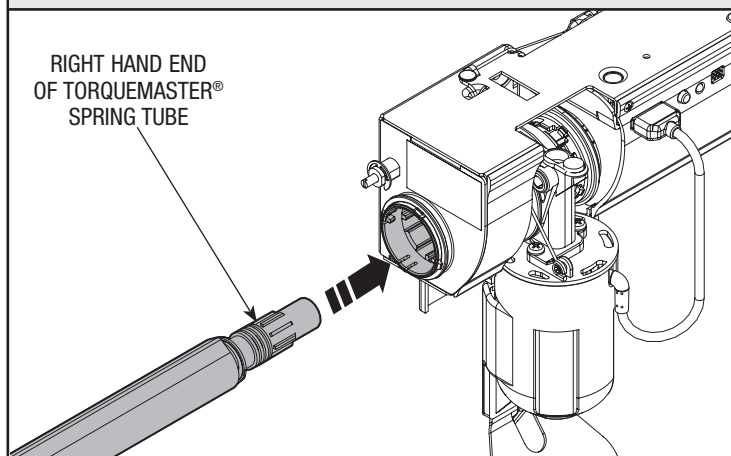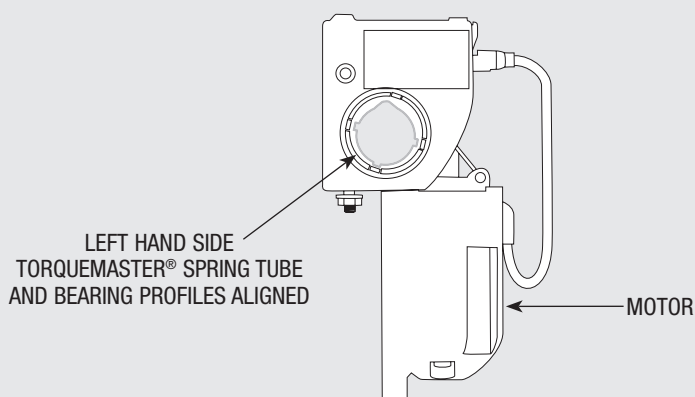

Cable Drum Installation

Tools Needed:
None

Shake the TorqueMaster® spring tube gently to extend the winding shafts out about 5" on each side.

NOTE: For single spring applications, there will be no left hand spring in the TorqueMaster® spring tube.

Lift the TorqueMaster® spring tube and rest it on the top of the flagangles.

For idrive® operated doors: Orient TorqueMaster® spring tube so that back of opener is flat against header/mounting surface.

NOTE: Cable drums are marked right and left hand. Cable drums and TorqueMaster® spring tube are cam shaped to fit together only one way.





To install the cable drum, slide the correct cable drum over the winding shaft until the cable drum seats against the TorqueMaster® spring tube. The winding shaft must extend past the cable drum far enough to expose the splines and the groove.

Align the winding shaft groove with the round notch in the flagangle.

For double spring applications:
Repeat for opposite side.

For single spring applications: Insert the loose winding shaft into the left hand cable drum prior to sliding the cable drum over the TorqueMaster® spring tube.

NOTE: On single spring applications, take care in handling the loose winding shaft (left side) so that it does not slide back into the TorqueMaster® spring tube.

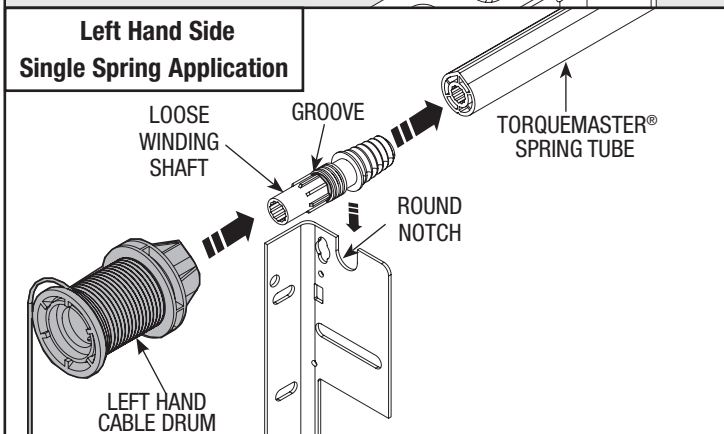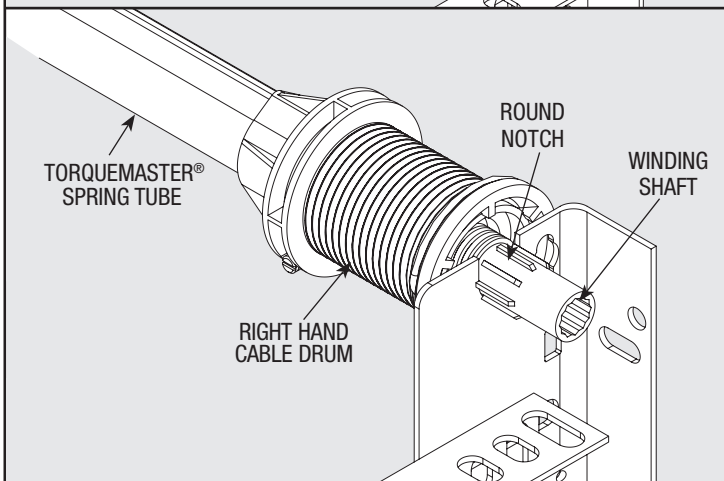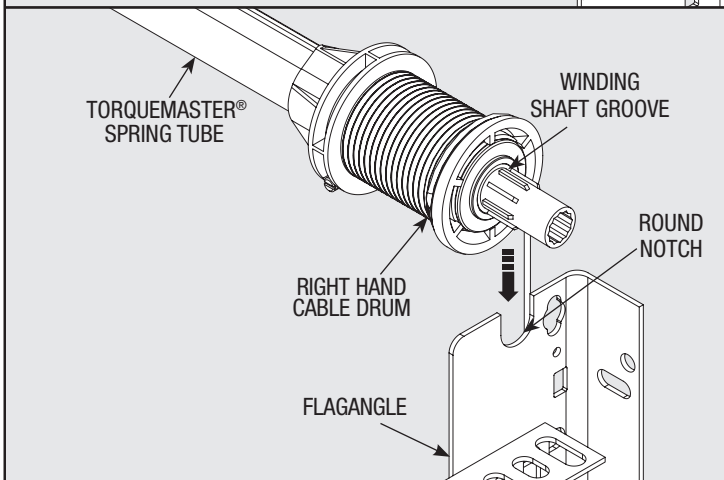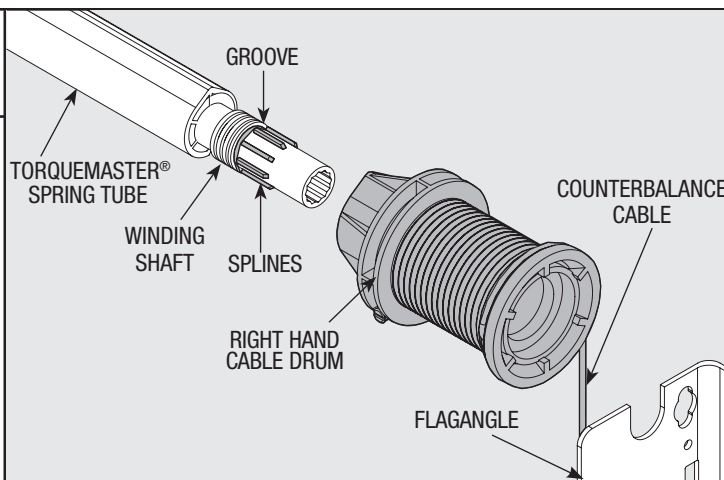

21


Drive Gear Installation

Tools Needed:

Beginning with the right hand side, lubricate entire circumference of the drive gear with the lubricating oil provided. Slide the drive gear onto the winding shaft splines until it touches the flagangle.

NOTE: On single spring applications, no drive gear is required on the left side.

NOTE: If additional lubricating oil is needed, use "Dura Lube® Engine Oil Treatment".

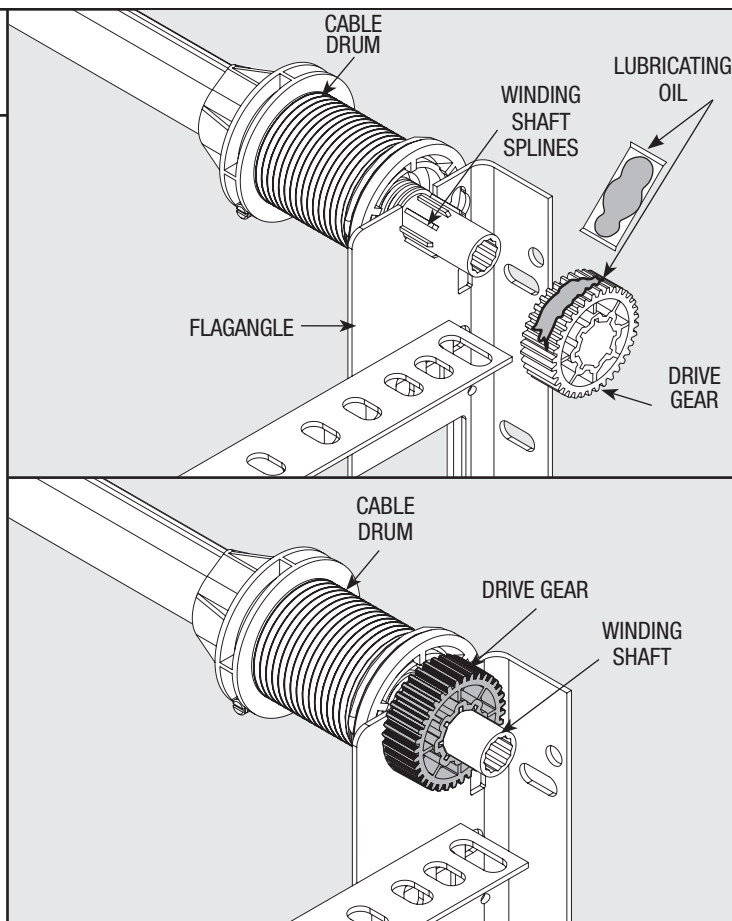

22

End Brackets

Tools Needed:

Power Drill

3/16" Drill Bit


7/16" Socket Driver

Phillips Head Screwdriver

IMPORTANT: WARNING TAGS MUST BE SECURELY ATTACHED TO BOTH END BRACKETS.

Slide the right hand end bracket over the drive gear and fasten to the flagangle using a #10 phillips head screw.

Drill 3/16" pilot holes into jamb for the lag screws. Secure end bracket and the flagangle to the jamb using (2) 5/16" x 2" hex head lag screws.

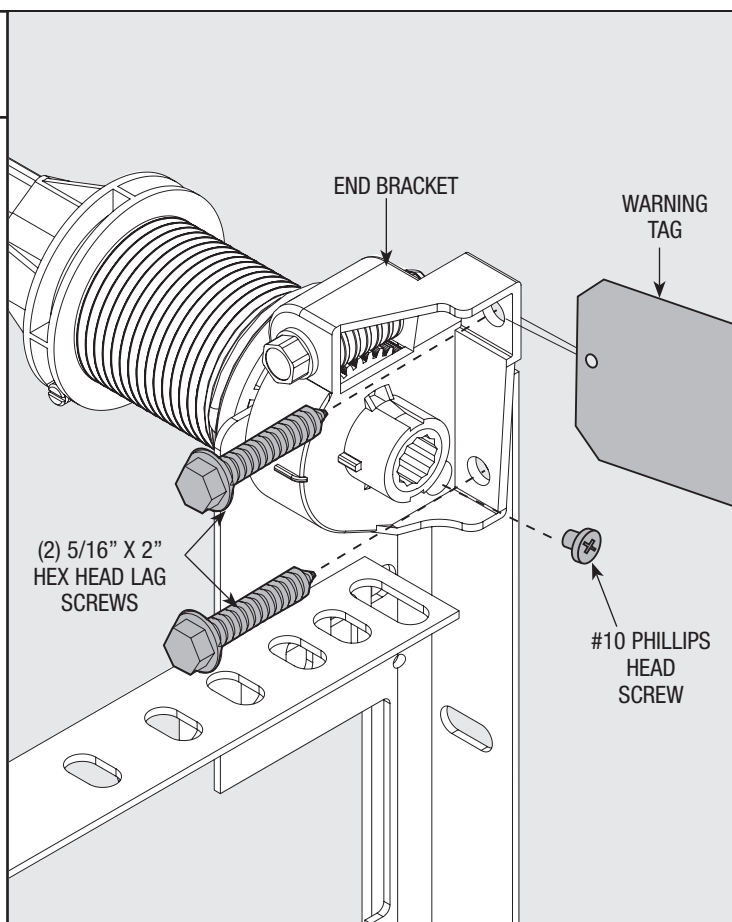

23

Counter Installation

Tools Needed:
None


Install the right side counter gear, with the missing tooth toward the outside and away from the end bracket. Press the counter gear onto the end bracket until snaps engage.

Select the right hand counter cover and align the hex of the counter cam with the end of the winding shaft. Also, align the "0" on the counter cover with the raised rib on the end bracket. Press the counter cover against the counter gear until it locks into place.

Repeat on left hand side for double spring applications.

NOTE: No drive gear, counter gear or counter cover is required on left hand side for single spring applications. Only an end bracket is needed.

IMPORTANT: AT THIS TIME DO NOT WIND COUNTERBALANCE SPRINGS!

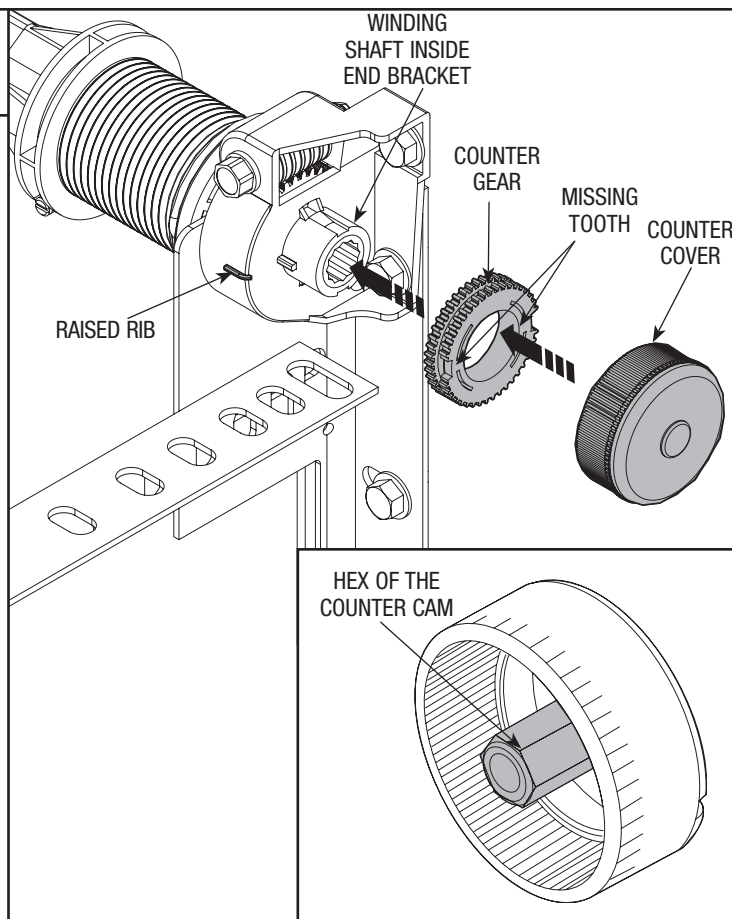

INSTALLATION

24

Securing Center Bracket Bushing

Tools Needed:
Power Drill
3/16" Drill Bit
7/16" Socket Driver

NOTE: If you are installing an iDrive® opener on your garage door, skip this step and continue with Step 25.


NOTE: If you are not installing an iDrive® opener on your garage door, you must install the center bracket bushing assembly. Follow these instructions for non-iDrive® operated garage doors.

NOTE: If you are installing a DoorMaster™ opener, see optional DoorMaster™ Bracket installations on page 33, Figure B.

IMPORTANT: TORQUEMASTER® SPRING TUBE MUST BE LEVEL AFTER CENTER BRACKET ASSEMBLY IS FASTENED TO HEADER.

To locate the center bracket, mark the header halfway between the flagangles and level the TorqueMaster® spring tube. Drill pilot holes into header for the lag screws. Fasten the metal bracket to the header using (2) 5/16" X 2" hex head lag screws.

NOTE: Upon completion of this step, continue with Step 29.

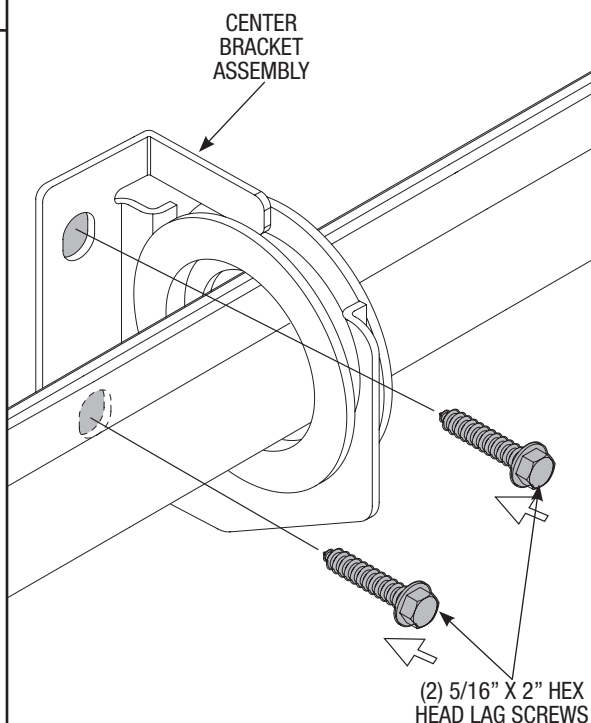

Positioning Support Bracket

Tools Needed:

Power Drill

1/8" Drill Bit

7/16" Socket Driver

Tape Measure

NOTE: See *i*drive® main installation and owners manual for *i*drive® parts.

NOTE: *i*drive® must be installed on a solid mounting surface.

Locate the mounting surface. The mounting surface is a vertical board running directly above the center of the door. Remove (2) 1/4"-20 flange nuts from bottom of opener.

NOTE: Do not discard flange nuts.

Place the support bracket underneath opener, to the right side of motor, centered on mounting surface. Using a tape measure, level the bottom of the TorqueMaster® spring tube to the top of the door section with the *i*drive® resting on the support bracket. Once TorqueMaster® spring tube is level, drill 1/8" pilot holes for the lag screws. Then secure support bracket to the mounting surface with (2) 1/4" x 1-1/2" hex had lag screws.




IMPORTANT: TORQUEMASTER® SPRING TUBE MUST BE LEVEL AFTER SUPPORT BRACKET IS FASTENED TO MOUNTING SURFACE.

NOTE: If wood mounting surface is behind dry wall, use 1/4" x 2" lag screws.

Lift and slide the opener over the support bracket, aligning the mounting studs with the bracket slots. Loosely fasten to mounting studs with the (2) 1/4"-20 flange nuts.

NOTE: Do not tighten 1/4"-20 flange nuts to opener studs at this time. Remove the temporary orange label holding the antenna wire. Straighten antenna wire and angle it 45 degrees to the right.

NOTE: Do not coil the antenna wire. This will reduce the radio signal range.

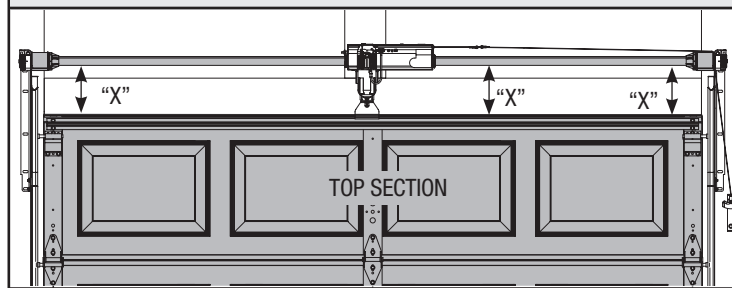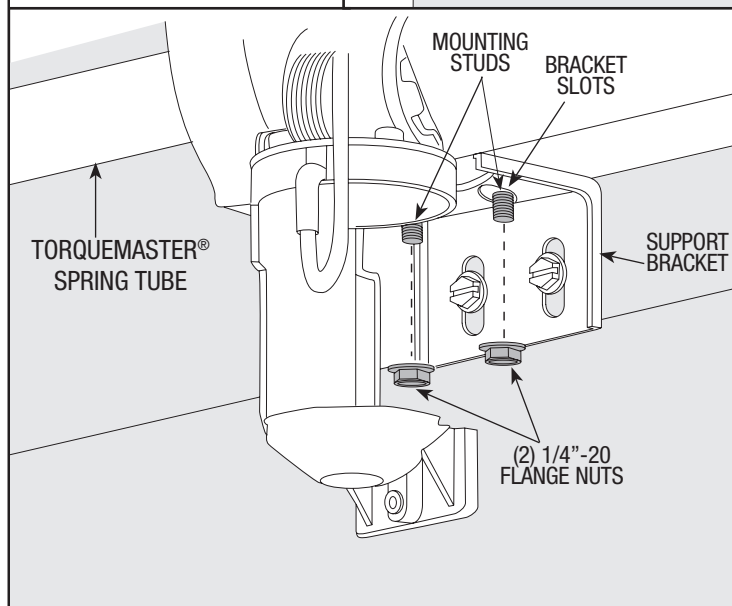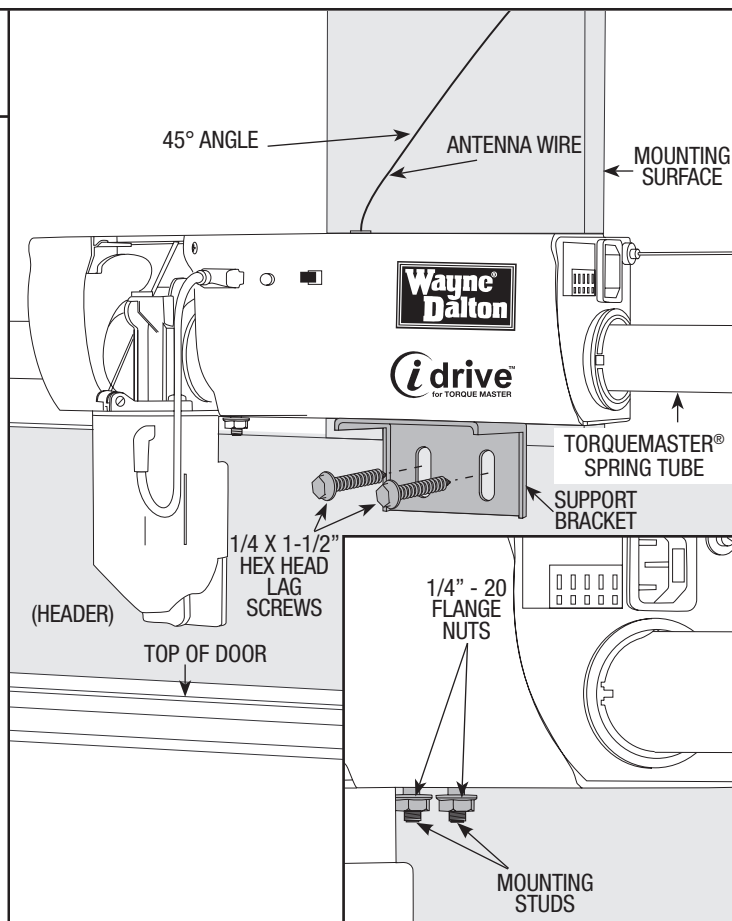

USING A TAPE MEASURE, MAINTAIN AN EQUAL MEASUREMENT "X" (TOP OF DOOR TO BOTTOM OF TORQUEMASTER® TUBE) AT BOTH ENDS AND THE CENTER.

26

Attaching Disconnect Cables


Tools Needed:

Pliers

NOTE: See *i*drive® main installation and owners manual for *i*drive® parts.

Attach the loose disconnect cable (located in opener hardware bag) to the opener with the “S” hook. Close both ends of the “S” hook to lock assembly together with pliers.

Thread the disconnect cable (behind the counterbalance cable) through the hole in the right hand end bracket, and remove all slack between opener and right end bracket.

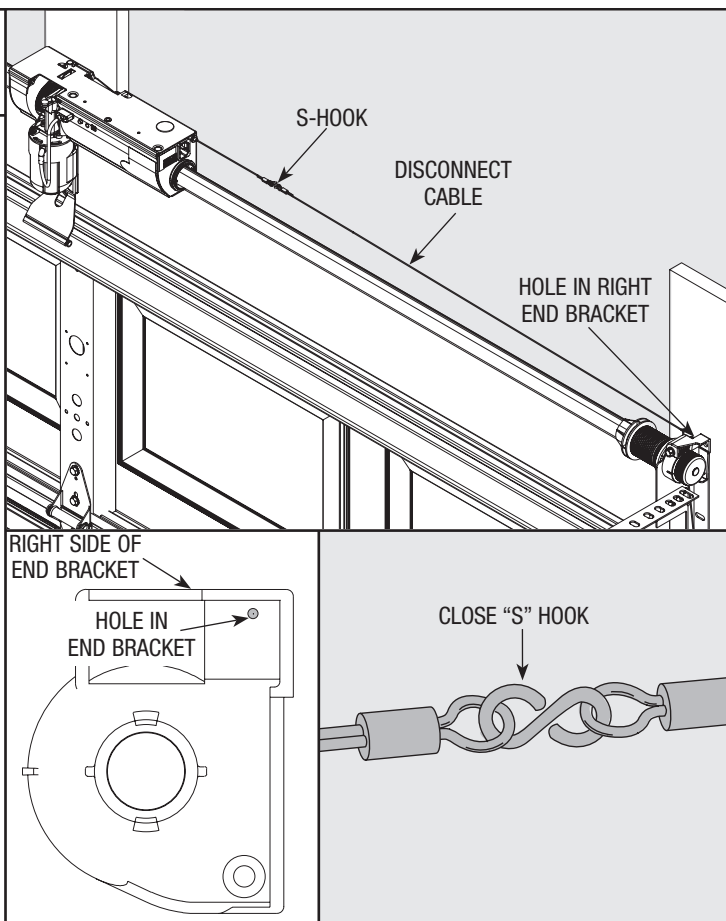

INSTALLATION

27

Mounting Disconnect Handle Bracket

Tools Needed:

Pencil

Tape Measure

1/8" Drill Bit

7/16" Socket Driver


Power Drill

NOTE: See *i*drive® main installation and owners manual for *i*drive® parts.

Mark a location on the right jamb, 6 feet above the floor to mount the disconnect handle bracket.

Drill 1/8" pilot holes for the lag screws.

Align top of the bracket with the mark. Fasten bracket to the jamb with (2) 1/4" x 1-1/2" hex head lag screws.

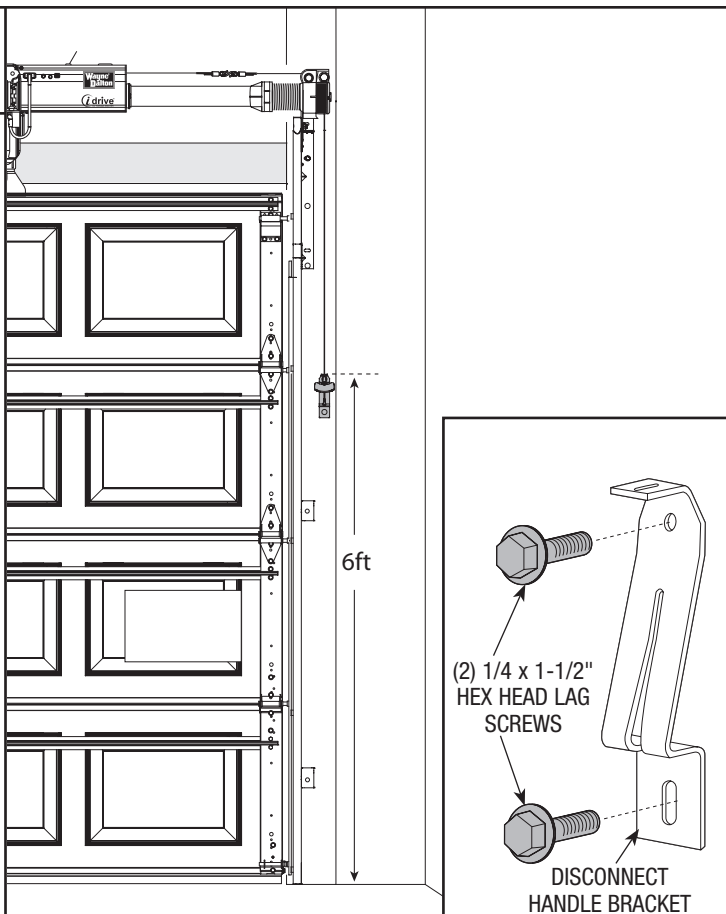

Attaching Disconnect Handle

Tools Needed:

Phillips Head
Screwdriver

Wire cutters

NOTE: See iDrive® main installation and owners manual for iDrive® parts.

NOTE: Bring motor to the down position by pulling the disconnect cable, insure opener disconnect teeth are engaged before installing disconnect handle.

Start the #6-20 x 1/2" screw into the disconnect handle. Thread the disconnect cable through the top of the disconnect handle bracket and then the disconnect handle.

Locate the disconnect handle in full upper position of disconnect handle bracket.


Remove all disconnect cable slack between the opener and the top of the disconnect handle bracket. Tighten #6-20 x 1/2" screw into the disconnect handle until snug, and then tighten screw an additional 1 to 1-1/2 turns to secure disconnect cable to the disconnect handle. Trim off excess cable from bottom of the disconnect handle.

CAUTION: PULL CABLE ONLY TAUT ENOUGH TO REMOVE THE CABLE SLACK. PULLING THE CABLE MORE COULD CAUSE OPENER TO DISCONNECT FROM THE TORQUEMASTER® SPRING TUBE.

Apply emergency disconnect label next to the mounted bracket. Use mechanical fasteners if adhesive will not adhere.



Using the emergency disconnect, pull disconnect handle downwards and place it in the manual door operated position (Use disconnect label for reference). Motor will be rotated 90° from its packaged position.

If motor does not pivot 90°, see troubleshooting section in the main installation and owners manual of your iDrive® opener

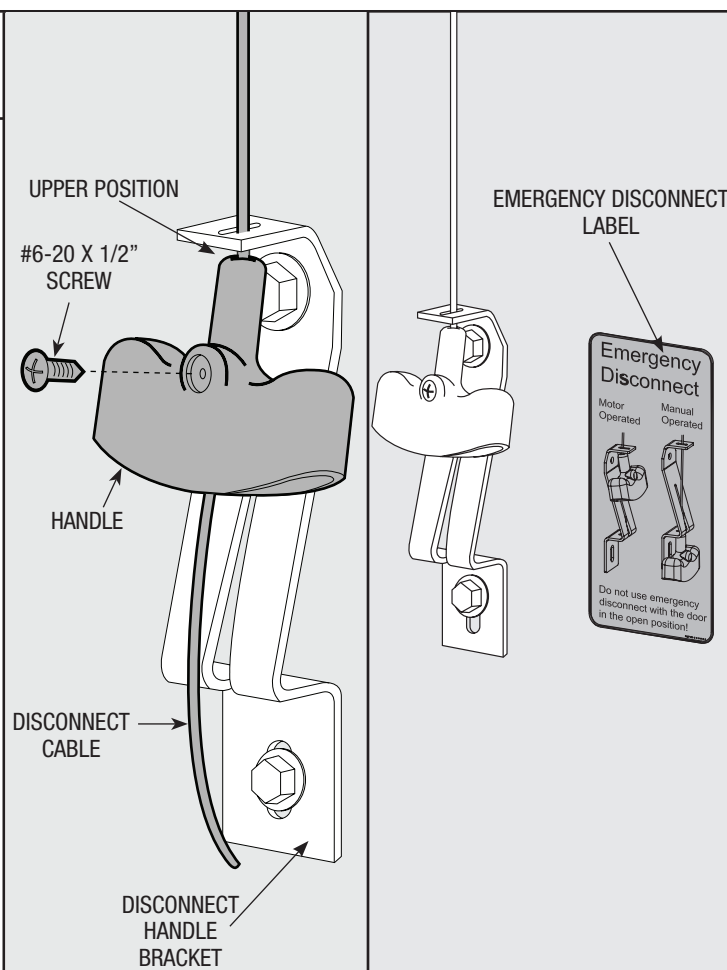

MANUAL OPERATED POSITION

MOTOR OPERATED POSITION

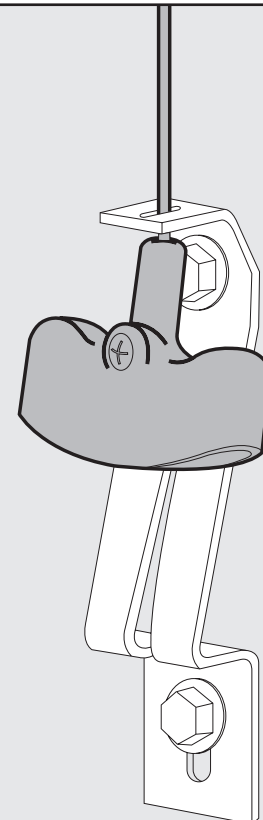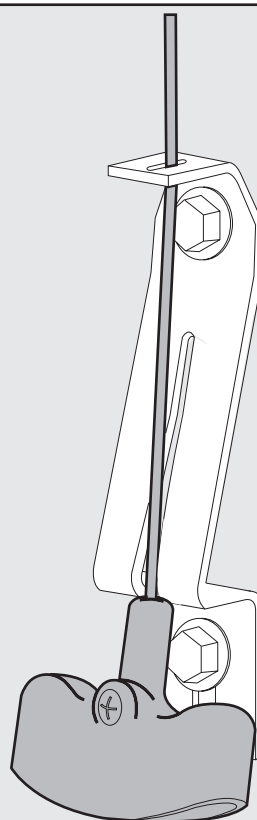

29

Securing Door for Spring Winding


Tools Needed:
(2) Vice Clamps

Place vice clamps onto both vertical tracks just above the third roller. This is to prevent the garage door from raising while winding counterbalance spring(s).

⚠ WARNING

FAILURE TO PLACE VICE CLAMPS ONTO VERTICAL TRACK CAN ALLOW DOOR TO RAISE AND CAUSE SEVERE OR FATAL INJURY.

IMPORTANT: DO NOT USE IMPACT GUN TO WIND SPRING(S).

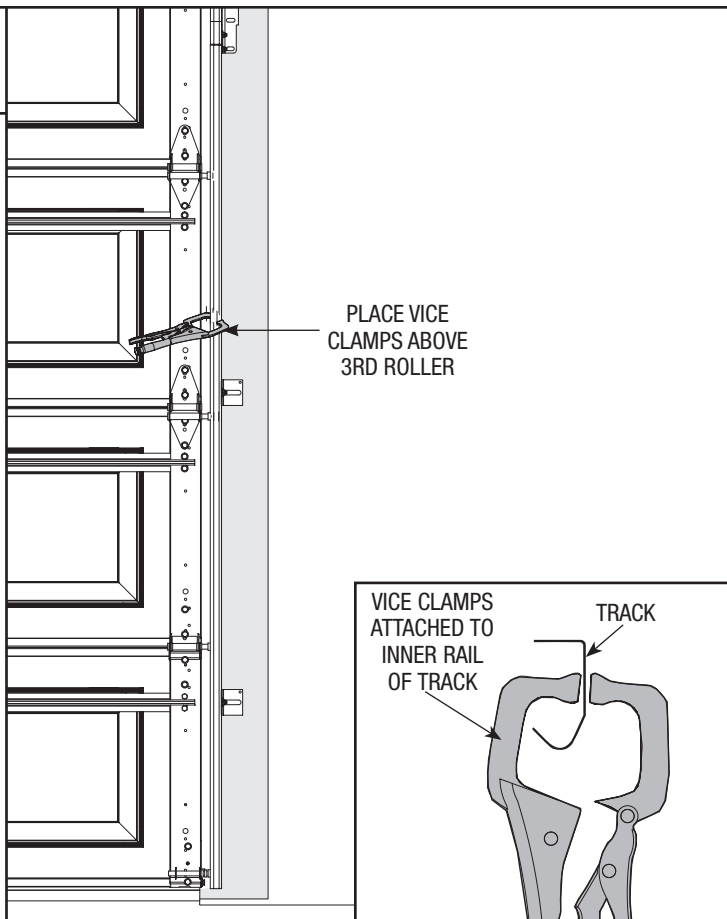

INSTALLATION

30


Cable Adjustments

Tools Needed:
Locking Pliers
Flat Tip Screwdriver
Wire Cutters

Rotate the cable drum until the set screw faces directly away from the header. TorqueMaster® spring tube cam peak should be pointing straight up.

Beginning with the right side, loosen the set screw approximately two turns, to adjust cable. Using locking pliers, pull on the end of the cable to remove all cable slack.

Check to ensure the cable is aligned and seated in the first groove of the cable drum. Snug the set screw, then tighten an additional 1-1/2 turns. Cut excess cable.

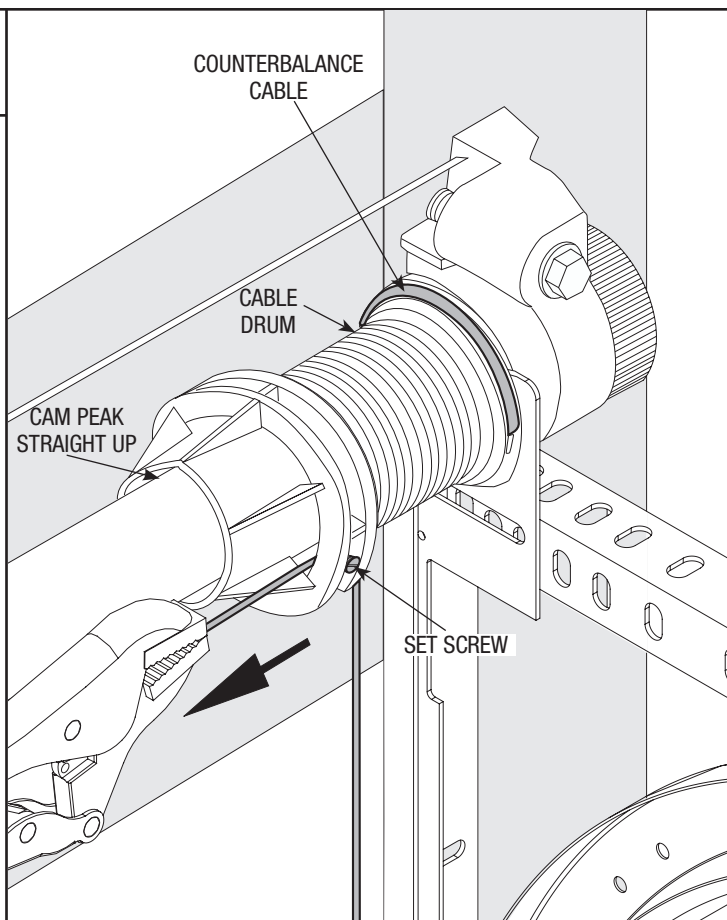

31

Winding Bolt Rotation

Tools Needed:
Power Drill
7/16" Socket
Driver

See chart in Step 32 for proper spring tension setting.

Beginning with the right hand side, ensure the cable is in the first groove of the cable drum. Apply light pressure to the canoe clip on counter cover while winding springs.


Using a power drill (high torque/gear reduced to 1300 RPM preferred) with a 7/16" socket, carefully rotate right hand winding bolt clockwise, until counter shows 2-3 turns.

This will keep the counterbalance cable taut while adjusting the left hand side counterbalance cable. Adjust left hand counterbalance cable tension. (refer to Step 30)

NOTE: Single spring applications require no spring winding on left hand side, but need cable tension adjusted.

NOTE: Ensure counterbalance cable tension is equal for both sides prior to fully winding spring(s) to appropriate number of turns. If cable tension is unequal refer to Step 30.

⚠ WARNING PRIOR TO WINDING OR MAKING ADJUSTMENTS TO THE SPRINGS, ENSURE YOU'RE WINDING IN THE PROPER DIRECTION AS STATED IN THE INSTALLATION INSTRUCTIONS. OTHERWISE, THE SPRING FITTINGS MAY RELEASE FROM SPRING IF NOT WOUND IN THE PROPER DIRECTION AND COULD RESULT IN SEVERE OR FATAL INJURY.

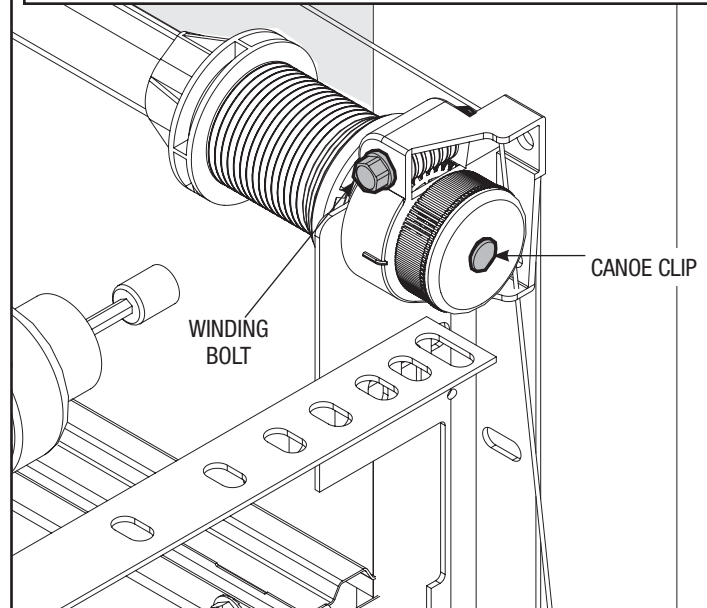

32

Setting Spring Tension

Tools Needed:
Power Drill
7/16" Socket
Driver
7/16" Wrench

NOTE: Apply light pressure to the canoe clip on the counter cover while winding spring(s). See the **Spring Turn** chart.


For **SINGLE SPRING** applications, return to the right hand side and carefully rotate the winding bolt head clockwise until the counter shows the correct number of turns for your door.

For **DOUBLE SPRING** applications, remain on the left hand side and carefully rotate the winding bolt head clockwise until the counter shows the correct number of turns for your door. Then return to the right hand side and wind the right hand spring to the required number of turns.

IMPORTANT: DO NOT OVERWIND.

After spring is wound, hold the lock nut (in back of end bracket) stationary on the right hand side with a 7/16" wrench while rotating the winding bolt clockwise until snug. Tightening of the lock nut prevents spring from unwinding. Repeat for opposite side for double spring TorqueMaster® systems.

IMPORTANT: CAUTIOUSLY REMOVE VICE CLAMPS FROM VERTICAL TRACKS. ADJUSTMENTS TO THE RECOMMENDED NUMBER OF TURNS MAY BE REQUIRED. AFTER REAR SUPPORT ASSEMBLY IS COMPLETE (STEP 39), CHECK DOOR BALANCE. IF DOOR RAISES OFF FLOOR UNDER SPRING TENSION ALONE, REDUCE SPRING TENSION UNTIL DOOR RESTS ON THE FLOOR. IF THE DOOR IS HARD TO RAISE OR DRIFTS DOWN ON ITS OWN, ADD SPRING TENSION. AN UNBALANCED DOOR SUCH AS THIS CAN CAUSE IDRIVE® OPERATION PROBLEMS.

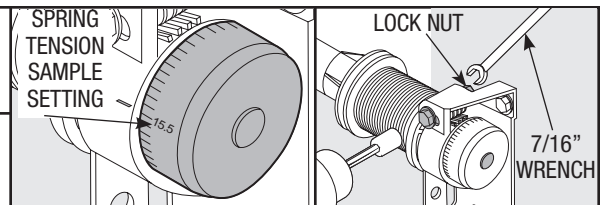

NOTE: For 7' high doors, 8', 9', 10', 16' or 18' wide with windows, the recommended number of spring turns is 15.

RECOMMENDED SPRING TURNS

Door Height	drive® Operated Doors 11'-11" Wide or Less	Manually Operated Door, and drive® Operated Doors 12' Wide or Greater
6'-0"	13-1/2	14
6'-3"	14	14-1/2
6'-5"	14-1/2	15
6'-6"	14-1/2	15
6'-8"	15	15-1/2
6'-9"	15	15-1/2
7'-0"	15-1/2	16
7'-3"	16	16-1/2
7'-6"	16-1/2	17
7'-9"	17	17-1/2
8'-0"	17-1/2	18

33

Drum Wrap Installation

Tools Needed:


None

Drum wraps are identified as right and left hand.

To install, place the drum wrap over the cable drum and under the *i*drive® disconnect cable (right hand side). Align the outside flange over the outside edge of the cable drum and push the drum wrap down onto the cable drum. Repeat for left hand side.

NOTE: Drum wraps must be installed to prevent cable from becoming tangled.

IMPORTANT: RIGHT AND LEFT HAND ARE ALWAYS DETERMINED FROM INSIDE THE GARAGE LOOKING OUT.

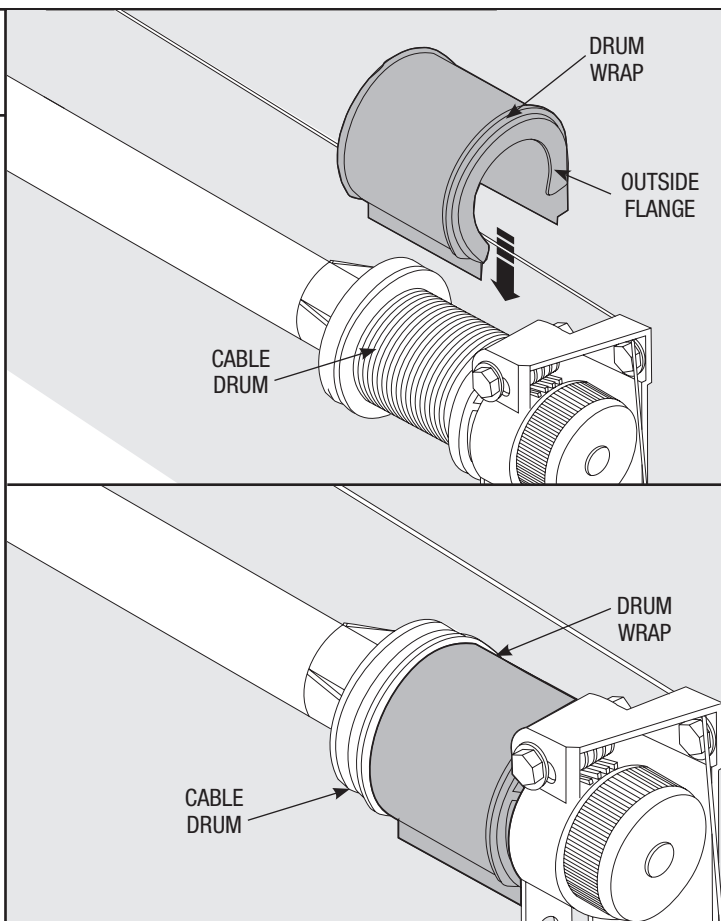

INSTALLATION

34

Rear Support

Tools Needed:

Ratchet Wrench

1/2" Socket

1/2" Wrench

(2) Vice Clamps

Tape Measure

Level

Hammer

⚠ WARNING

KEEP HORIZONTAL TRACK PARALLEL AND WITHIN 3/4" MAXIMUM OF DOOR EDGE, OTHERWISE DOOR COULD FALL, RESULTING IN SEVERE INJURY OR DEATH.


Raise the door until the top section and half of the next section are in a horizontal position. Do not raise door any further since the horizontal tracks are not yet supported at the rear.

⚠ WARNING

RAISING DOOR FURTHER CAN RESULT IN DOOR FALLING AND CAUSE SEVERE INJURY OR DEATH.

Clamp a pair of vice clamps on the vertical tracks just above the second roller on one side and below the second roller on the other side. This will prevent the door from raising or lowering while installing the rear support.

Using perforated angle, 5/16" x 1-5/8" hex head lag screws and 5/16" bolts with nuts (may not be supplied), fabricate rear support for horizontal tracks. Attach

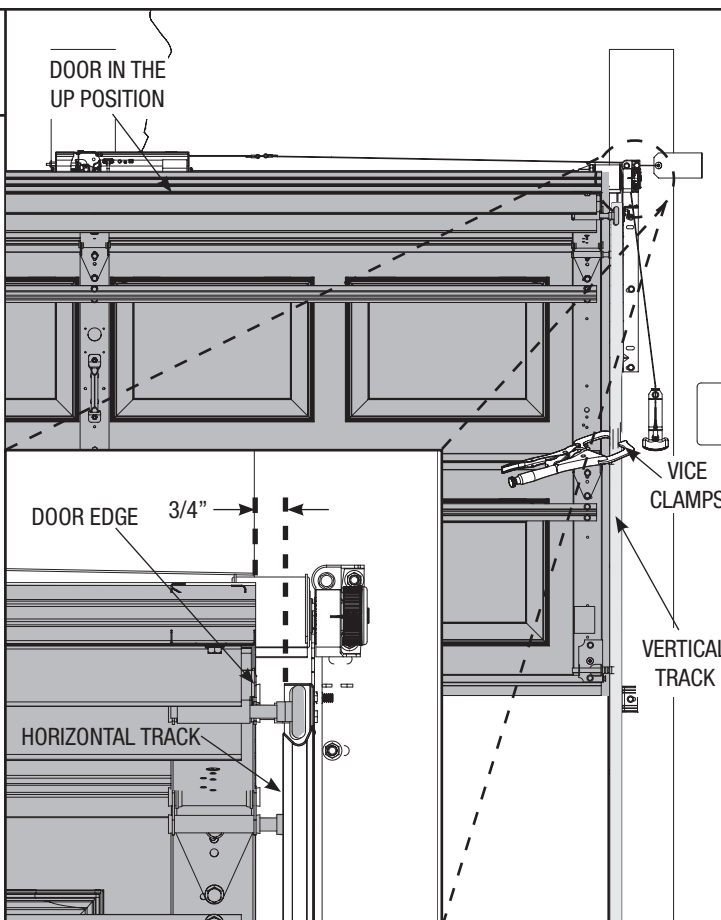

Rear Support Continued...

Tools Needed:

horizontal tracks to the rear supports with 5/16"-18 x 1-1/4" hex head bolts and nuts (may not be supplied). Horizontal tracks must be level and parallel with door.

NOTE: If rear supports are to be installed over drywall, use 5/16" x 2" hex head lag screws.

NOTE: If an *idrive*® opener will be installed, position horizontal tracks one hole above level when securing it to rear supports.

Adjust weather seal (if necessary). Now permanently attach the weather seal to both door jambs and header. (Temporarily attached in PREPARING THE OPENING on page 10.) Avoid pushing weather seal too tightly against face of door.

WARNING

PRIOR TO WINDING OR MAKING ADJUSTMENTS TO THE SPRINGS, ENSURE YOU'RE WINDING IN THE PROPER DIRECTION AS STATED IN THE INSTALLATION INSTRUCTIONS. OTHERWISE, THE SPRING FITTINGS MAY RELEASE FROM SPRING IF NOT WOUND IN THE PROPER DIRECTION AND COULD RESULT IN SEVERE OR FATAL INJURY.





Now, lift door and check it's balance. Adjust, if door lifts by itself (hard to pull down) or if door is difficult to lift (easy to pull down). Anytime spring adjustments are made you must loosen the lock nuts to begin with and retighten both lock nuts afterwards. To adjust spring(s), only add or remove 1/4 turn on the counter at a time. Adjust both sides equally.

IMPORTANT: DO NOT ADD OR REMOVE MORE THAN 1 SPRING TURN FROM SPECIFIED AMOUNT. IF THE DOOR STILL DOES NOT OPERATE EASILY, LOWER THE DOOR INTO THE CLOSED POSITION, UNWIND SPRING(S) TO ZERO, AND RECHECK THE FOLLOWING ITEMS:

1. Check the door for level.
2. Check the TorqueMaster® Spring Tube and flagangles for level and plumb.
3. Check the distance between the flagangles - must be door width plus 3-3/8" to 3-1/2".
4. Check the counterbalance cables for equal tension - adjust if necessary.
5. Rewind the spring(s).
6. Make sure door isn't rubbing on jambs.

NOTE: As a safety feature, the right hand end bracket cannot be disassembled for service until the spring is completely unwound and the counter cover reads zero.

After door installation is completed, refer to the *idrive*® owner's manual.

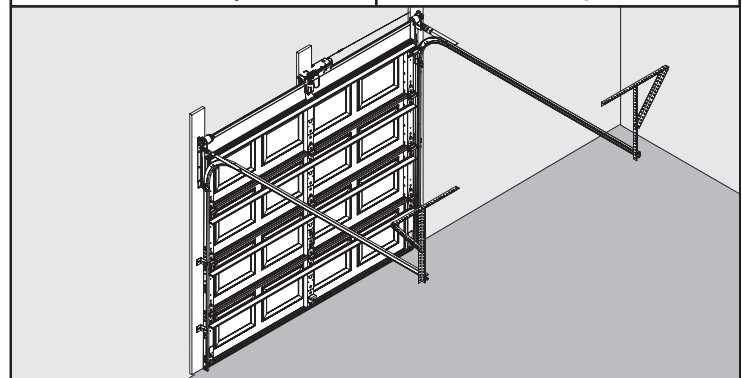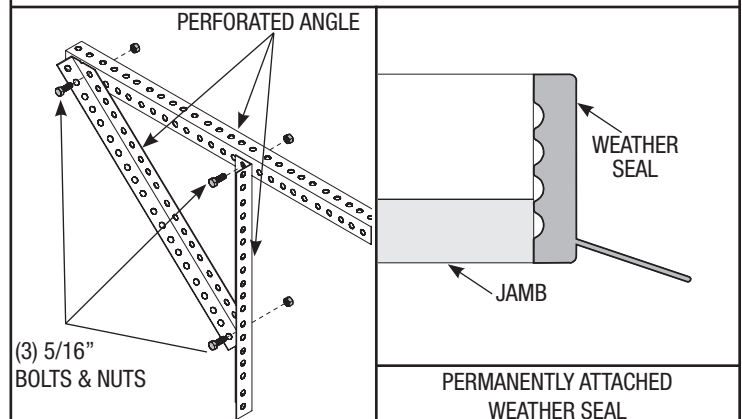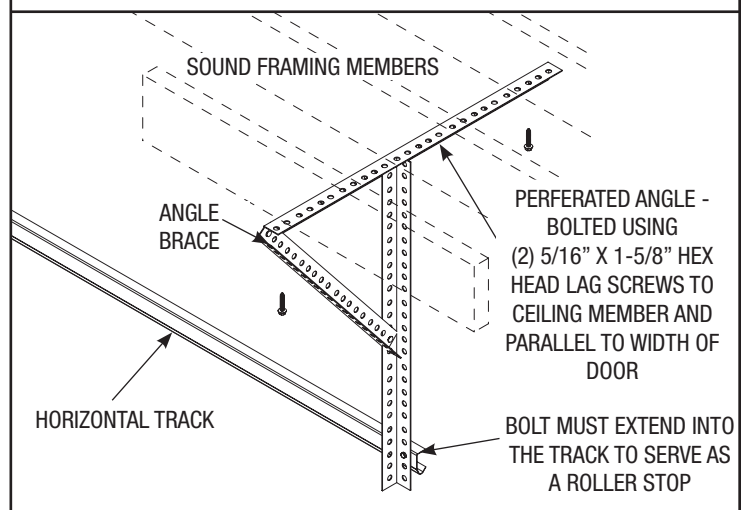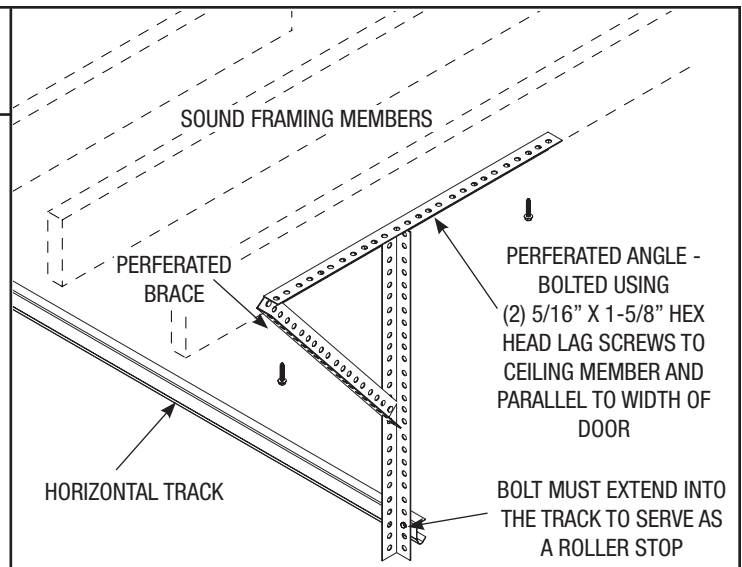



Side Lock


Tools Needed:

Power Drill
7/16" Socket
Driver
Tape Measure

Install the side lock on the second section of the door. Secure the lock to the section with (4) 1/4" - 20 x 11/16" self drilling screws. Square the lock assembly with the door section and align with the square hole in the vertical track. The side lock should be spaced in approximately 1/8" from the section edge.

IMPORTANT: SIDE LOCKS MUST BE REMOVED OR MADE INOPERATIVE IN THE UNLOCKED POSITION IF AN OPERATOR IS INSTALLED ON THE DOOR.

NOTE: After completing this step, continue with Step 13 on page 19.

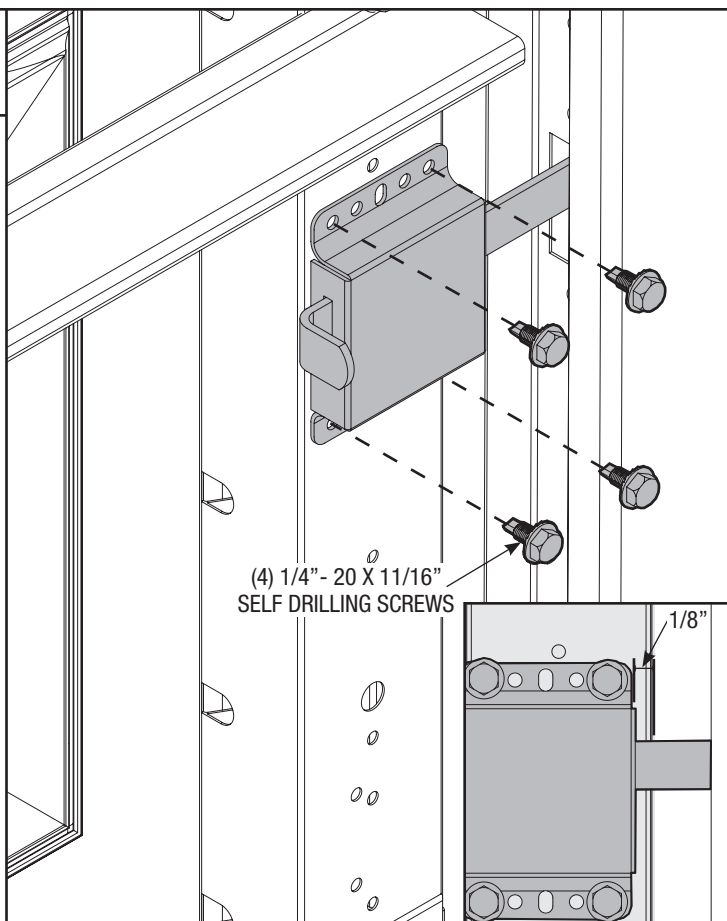

DoorMaster™ Bracket

Tools Needed:


A

NOTE: When installing a DoorMaster™ operator use the center bracket and drive gear supplied with your operator (located in DoorMaster™ package).

Slide the DoorMaster™ bracket/drive gear assembly onto the TorqueMaster® spring tube, so that the drive gear/center bracket assembly are in the center of the TorqueMaster® spring tube.

NOTE: After completing this step, continue with step 20 on page 23.

A

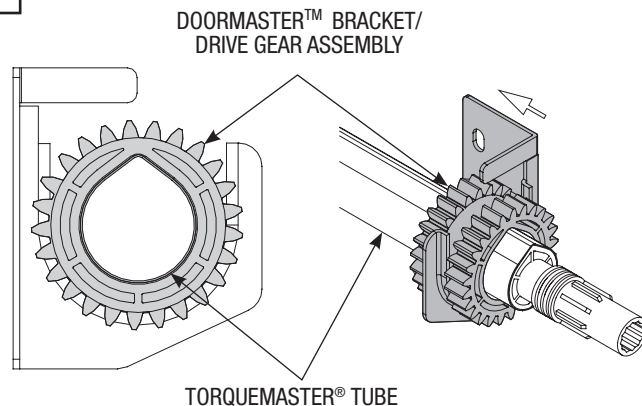

Tools Needed:

Power Drill
1/8" Drill Bit
7/16" Socket
Driver

Tape Measure


Level


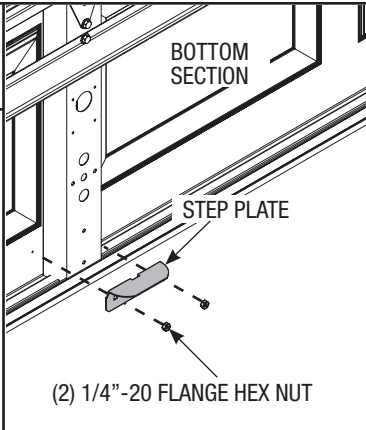
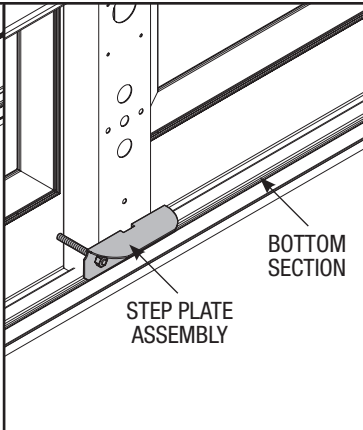
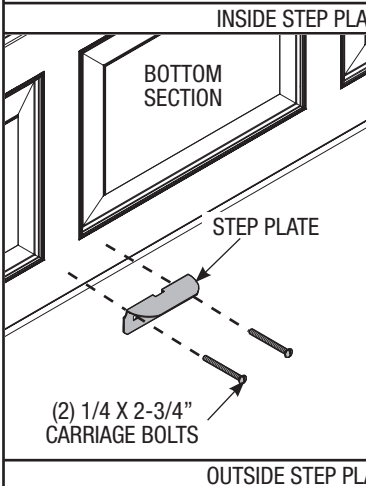
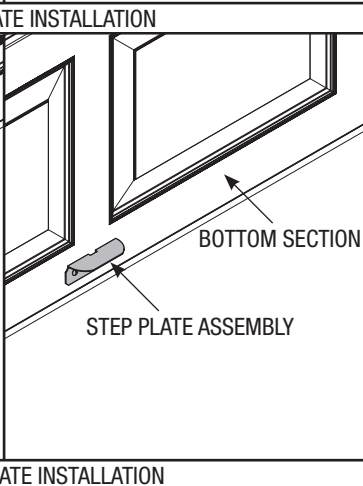
B


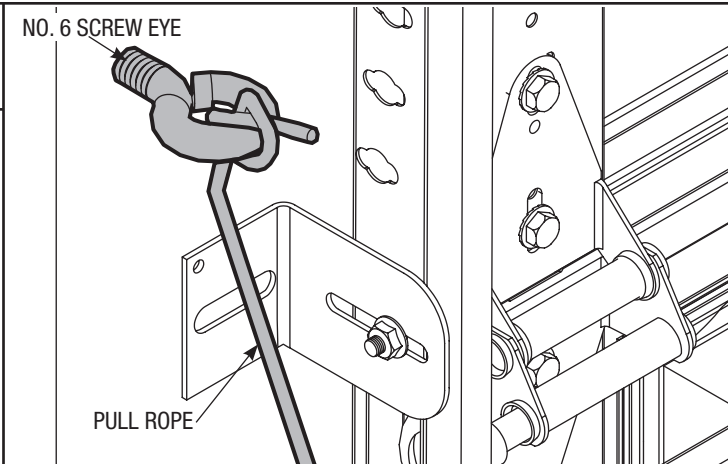
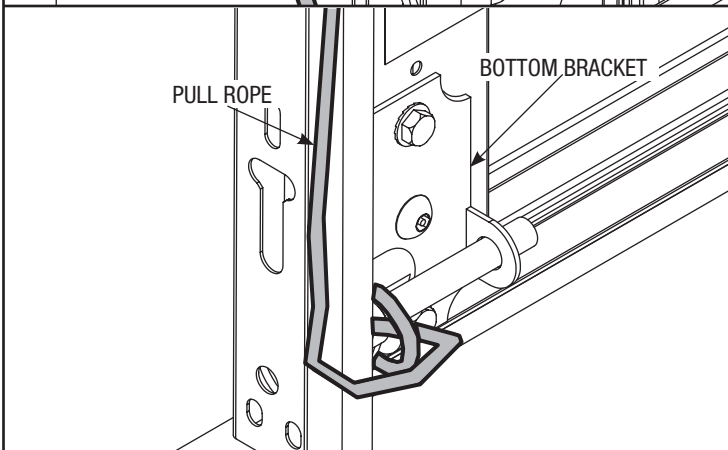
Locate the center bracket, mark the header halfway between the flagangles and level the TorqueMaster® spring tube. Drill 1/8" pilot holes for the lag screws. Fasten the metal bracket to the header using (2) 1/4" x 1-1/2" hex head lag screws.

NOTE: After completing this step, continue with step 29 on page 29.

B

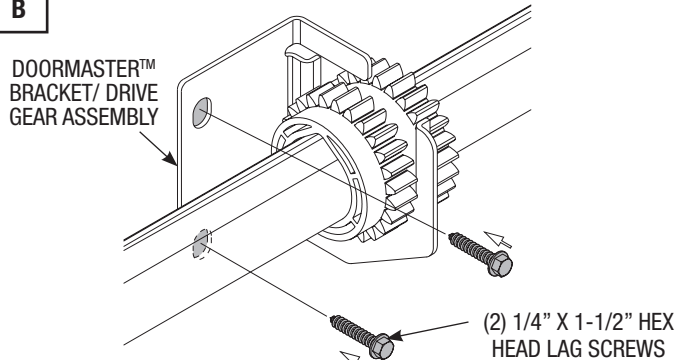

	<h2>Step Plate</h2>		
<p>Tools Needed:</p> <p>Pencil</p> <p>1/4" Wrench</p>	<p>Locate the center stile on the bottom section of the door.</p> <p>On the outside of the door, position step plate directly above astragal retainer. Using the step plate as a template, mark hole locations for mounting on door face.</p> <p>Drill (2) 5/16" dia. holes through the door face and insulation, if necessary, at marked locations, being careful to keep drill straight.</p> <p>Mount step plates back to back, straddling stile. Secure with (2) 1/4 x 2-3/4" carriage bolts and 1/4"-20 flange hex nuts.</p> <p>NOTE: After completing this step, continue with Step 13 on page 18.</p>	<h3>INSIDE STEP PLATE INSTALLATION</h3>   <h3>OUTSIDE STEP PLATE INSTALLATION</h3>	

	<h2>Pull Rope</h2>	 	
<p>Tools Needed:</p> <p>Power Drill</p> <p>Drill Bit</p>	<p>⚠ WARNING</p> <p>DO NOT INSTALL PULL ROPES ON DOORS WITH ELECTRIC OPERATORS. CHILDREN MAY BECOME ENTANGLED IN THE ROPE CAUSING SEVERE OR FATAL INJURY.</p> <p>Measure and mark the jamb approximately 48" to 50" (1220 to 1270 mm) from floor on the right or left side of door. Drill 1/8" pilot hole for No. 6 screw eye. Tie the pull rope to the No. 6 screw eye and to the bottom bracket as shown.</p>		



Trolley Operator

Tools Needed:

Tape Measure

Power Drill




7/16" Socket
Driver

WARNING

OPERATOR MUST BE TESTED AT TIME OF INSTALLATION AND MONTHLY THEREAFTER TO ENSURE THAT DOOR REVERSES ON CONTACT WITH 2 X 4 BOARD LAID FLAT UNDER THE DOOR. FAILURE TO ADJUST OPERATOR, IF NECESSARY, CAN RESULT IN SEVERE OR FATAL INJURY. IF YOUR OPERATOR IS EQUIPPED WITH A PHOTOELECTRIC EYE SYSTEM, THEN THIS MUST BE TESTED AT THE SAME TIME TO ENSURE THAT DOOR DOES NOT CLOSE AND A CLOSING DOOR OPENS IF PHOTOELECTRIC EYE SYSTEM IS OBSTRUCTED. FAILURE TO MAKE ADJUSTMENTS, IF NECESSARY, CAN RESULT IN SEVERE OR FATAL INJURY.

1. Install operator rail 1/2" to 1-1/2" (13 - 38 mm) above high arc of top section of the door.
2. Mount operator to ceiling so that 1" to 1-1/2" (25 - 38 mm) clearance is maintained between trolley rail and top section when door is fully open (trolley rail will slope down towards rear).
3. Attach door arm to operator bracket.
4. Attach operator rail to suitable mounting surface 2x6 lumber minimum.
5. Attach operator to ceiling using perforated angle.

IMPORTANT: PERFORATED ANGLES MUST BE SECURELY ATTACHED TO SOUND FRAMING MEMBER(S).

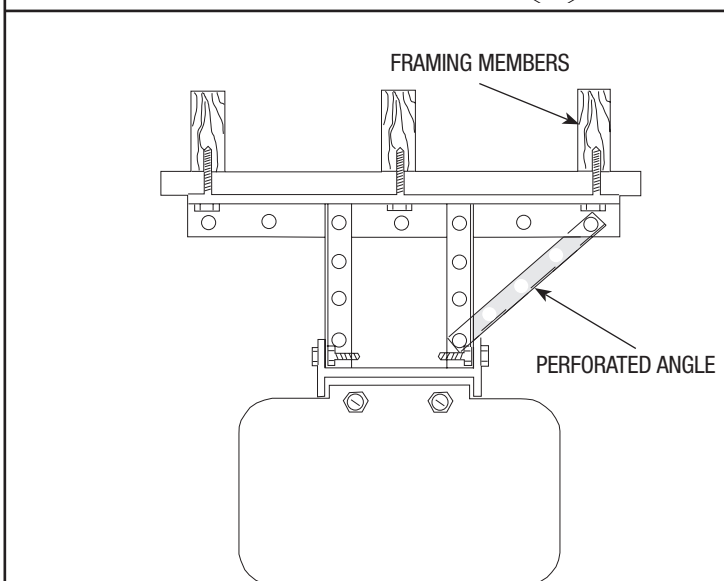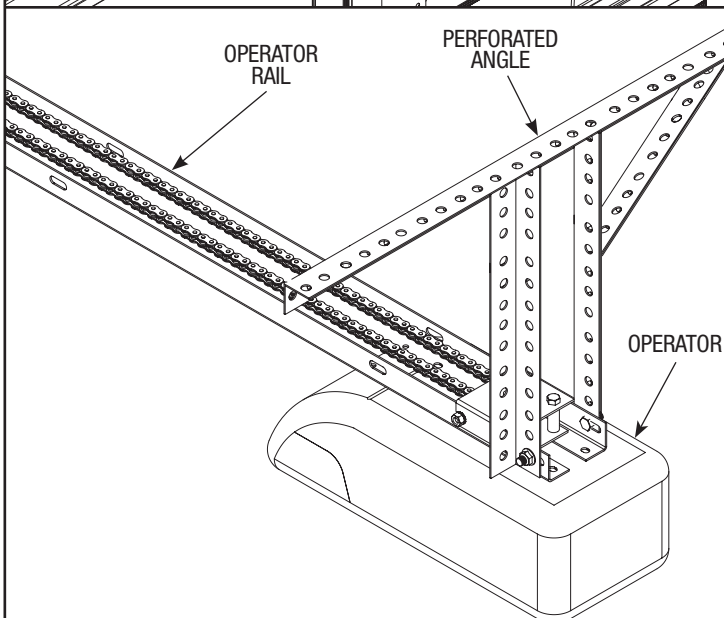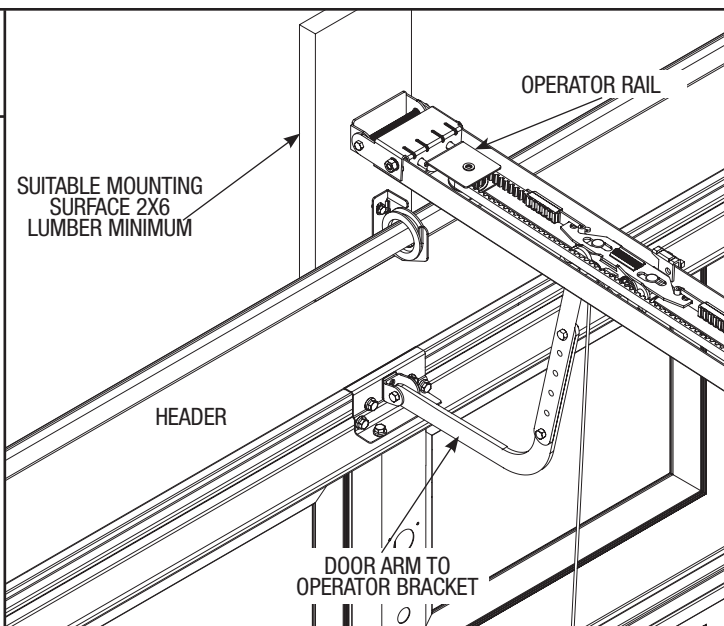

OPTIONAL INSTALLATION



Cleaning

Cleaning Your Garage Door

IMPORTANT: DO NOT USE A PRESSURE WASHER ON YOUR GARAGE DOOR!

While factory-applied finishes on garage doors are durable, it is desirable to clean them on a routine basis. Some discoloration of the finish may occur when a door has been exposed to dirt-laden atmosphere for a period of time. Slight chalking may also occur as a result of direct exposure to sunlight.

Cleaning the door will generally restore the appearance of the finish. To maintain an aesthetically pleasing finish of the garage door, a periodic washing of the garage door is recommended.

The following cleaning solution is recommended

A mild detergent solution consisting of one cup detergent (with less than 0.5% phosphate) dissolved into five gallons of warm water will aid in the removal of most dirt.

NOTE: The use of detergents containing greater than 0.5% phosphate is not recommended for use in general cleaning of garage doors.

NOTE: Be sure to clean behind weather stripping on both sides and top of door.

CAUTION: NEVER MIX CLEANSERS OR DETERGENTS WITH BLEACH.

GLASS CLEANING INSTRUCTIONS

Clean with a mild detergent solution (same as above) and a soft cloth. After cleaning, rinse thoroughly.

ACRYLIC CLEANING INSTRUCTIONS

Clean acrylic glazing with nonabrasive soap or detergent and plenty of water. Use your bare hands to feel and dislodge any caked on particles. A soft, grit-free cloth, sponge or chamois may be used to wipe the surface. Do not use hard or rough cloths that will scratch the acrylic glazing. Dry glazing with a clean damp chamois.

NOTE: DO NOT USE any window cleaning fluids, scouring compounds, gritty cloths or solvent-based cleaners of any kind.



Painting

Surface Preparation for Painting

Wax on the surface must be removed or paint peeling/flaking will result. To remove this wax, it will be necessary to lightly scuff the surface with a fine steel wool pad, saturated with soapy water. A final wipe and rinse should be done with clean water only, to remove any loose particles and any soapy film residue.

Surface scratches, which have not exposed the metal substrate, can be lightly buffed or sanded with 0000 steel wool or No. 400 sand paper to create a smoother surface. Care must be taken to not expose the substrate under the paint. Once the substrate is exposed, the likelihood for rusting is greatly increased.

If substrate is exposed, it must be treated to prevent rust from forming. Sand the exposed area lightly and paint with a high quality metal primer, specifically intended for galvanized surfaces, to protect the area from corrosion. Allow for drying time on primer can label before applying topcoat. The surface of the factory-applied finish, that is being painted, must not be too smooth, or the paint will not adhere to it. It is advisable to test in an inconspicuous area, to evaluate adhesion. If poor adhesion is observed, surface preparation for painting the factory-applied finish must be repeated until desired results are achieved. Again, care must be taken to not expose the substrate under the paint.

Painting

After surface has been properly prepared, it must be allowed to dry thoroughly, and then coated immediately with premium quality latex house paint. Follow paint label directions explicitly. Oil base or solvent base paints are not recommended. Please note that if substrate is exposed and not properly primed, painting with latex paint may cause accelerated rusting of the steel in the exposed area.

NOTES:

1. Repainting of finish painted steel doors cannot be warranted, as this condition is totally beyond the door manufacturer's control.
2. Consult a professional coatings contractor if in doubt about any of the above directions.
3. Follow directions explicitly on the paint container labels for proper applications of coatings and disposal of containers. Pay particular attention to acceptable weather and temperature conditions in which to paint.

Limited Warranty

Models 8000, 8100, 8200 and 46

Subject to the terms and conditions contained in this Limited Warranty, Wayne-Dalton Corp. ("Manufacturer") warrants the sections of the door, which is described at the top of this page, for a period of **TEN (10) YEARS** from the date of installation against:

- (i) The door becoming inoperable due to rust-through of the steel skin from the core of the door section, due to cracking, splitting, or other deterioration of the steel skin, or due to structural failure caused by separation or degradation of the foam insulation.
- (ii) Peeling of the original paint on the door as a result of a defect in the original paint or in the application of the original paint coating, in cases where the door sections and the original paint: (a) have not been subjected to adverse atmospheric conditions or contaminants (such as salt water or other marine environment, or to toxic or abrasive substances, including those in the air); (b) have been maintained in compliance with Manufacturer's recommendations; and (c) have not been subject to physical abrasion, impacted by a hard object, or punctured (including without limitation "paint rub" occurring in metal to metal contact and movement).

The Manufacturer warrants the garage door hardware (except springs) and the tracks of the above-described door, for a period of **TEN (10) YEARS** from the date of installation, against defects in material and workmanship, subject to all the terms and conditions below.

The Manufacturer warrants those component parts of the door not covered by the preceding provisions of this Limited Warranty against defects in material and workmanship for a period of **ONE (1) YEAR** from the date of installation.

This Limited Warranty is extended only to the person who purchased the product and continues to own the premises (where the door is installed) as his/her primary residence ("Buyer"). This Limited Warranty does not apply to residences other than primary, or to commercial or industrial installations, or to installations on rental property (even when used by a tenant as a residence). This Limited Warranty is not transferable to any other person (even when the premises is sold), nor does it extend benefits to any other person.

The Manufacturer will not be responsible for any damage attributable to improper storage, improper installation, or any alteration of the door or its components, abuse, damage from corrosive fumes or substances, salt spray or saltwater air, fire, Acts of God, failure to properly maintain the door, or attempt to use the door, its components or related products for other than its intended purpose and its customary usage. This Limited Warranty does not cover ordinary wear. This Limited Warranty will be voided if the original finish is painted over, unless Manufacturer's preparation and painting instructions are followed explicitly. This Limited Warranty will be voided if any holes are drilled into the door, other than those specified by the Manufacturer.

THIS LIMITED WARRANTY COVERS A CONSUMER PRODUCT AS DEFINED BY THE MAGNUSON-MOSS ACT. NO WARRANTIES, EXPRESS OR IMPLIED (INCLUDING BUT NOT LIMITED TO THE WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE) WILL EXTEND BEYOND THE TIME PERIOD SET FORTH IN **UNDERScoreD BOLD FACE TYPE** IN THIS LIMITED WARRANTY, ABOVE.

- Some States do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply to you.

Any claim under this Limited Warranty must be made in writing, within the applicable warranty period, to the dealer from which the product was purchased. Unless the dealer is no longer in business, a written claim to the Manufacturer will be the same as if no claim had been made at all.

At the Manufacturer's option, a service representative may inspect the product on site, or Buyer may be required to return the product to the Manufacturer at Buyer's expense. Buyer agrees to cooperate with any representative of the Manufacturer and to give such representative full access to the product with the claimed defect and full access to the location of its installation.

If the Manufacturer determines that the claim is valid under the terms of this Limited Warranty, the Manufacturer will repair or replace the defective product. The decision about the manner in which the defect will be remedied will be at the discretion of the Manufacturer, subject to applicable law. THE REMEDY WILL COVER ONLY MATERIAL. THIS LIMITED WARRANTY DOES NOT COVER OTHER CHARGES, SUCH AS FIELD SERVICE LABOR FOR REMOVAL, INSTALLATION, PAINTING, SHIPPING, ETC.

Any repairs or replacements arranged by Manufacturer will be covered by (and subject to) the terms, conditions, limitations and exceptions of this Limited Warranty; provided, however, that the installation date for the repaired or replaced product will be deemed to be the date the original product was installed, and this Limited Warranty will expire at the same time as if there had been no defect. If a claim under this Limited Warranty is resolved in a manner other than described in the immediately preceding paragraph, then neither this Limited Warranty nor any other warranty from the Manufacturer will cover the repaired or replaced portion of the product.

THE REMEDIES FOR THE BUYER DESCRIBED IN THIS LIMITED WARRANTY ARE EXCLUSIVE and take the place of any other remedy. The liability of the Manufacturer, whether in contract or tort, under warranty, product liability, or otherwise, will not go beyond the Manufacturer's obligation to repair or replace, at its option, as described above. THE MANUFACTURER WILL NOT UNDER ANY CIRCUMSTANCES BE LIABLE FOR SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, including (but not limited to) damage or loss of other property or equipment, personal injury, loss of profits or revenues, business or service interruptions, cost of capital, cost of purchase or replacement of other goods, or claims of third parties for any of the foregoing.

- Some States do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

No employee, distributor, dealer, representative, or other person has the authority to modify any term or condition contained in this Limited Warranty or to grant any other warranty on behalf of or binding on the Manufacturer, and anyone's attempt to do so will be null and void.

Buyer should be prepared to verify the date of installation to the satisfaction of the Manufacturer.

The rights and obligations of the Manufacturer and Buyer under this Limited Warranty will be governed by the laws of the State of Ohio, USA, to the extent permitted by law.

- This Limited Warranty gives you specific legal rights and you may also have other rights, which may vary from State to State.

Covered by one or more of the following Patents; 5,408,724; 5,409,051; 5,419,010; 5,495,640; 5,522,446; 5,562,141; 5,566,740; 5,568,672; 5,718,533; 6,019,269; 6,089,304; 6,644,378; 6,374,567; 6,561,256; 6,527,037; 6,640,872; 6,672,362; 6,725,898; 6,843,300; 6,915,573; 6,951,237; 7,014,386; 7,036,548; 7,059,380; 7,121,317; 7,128,123; 7,134,471; 7,134,472; 7,219,392; 7,254,868. Canadian: 2,384,936; 2,477,445; 2,495,175; 2,507,590; 2,530,701; 2,530,74; 2, 2,532,824. Other US and Foreign Patents pending

Please Do Not Return This Product To The Store

Contact your local Wayne-Dalton dealer. To find your local Wayne-Dalton dealer, refer to your local yellow pages business listings or go to the **Find a Dealer** section online at www.wayne-dalton.com

Thank you for your purchase